

EXHIBIT 8



US008190223B2

(12) **United States Patent**
Al-Ali et al.

(10) **Patent No.:** **US 8,190,223 B2**
(45) **Date of Patent:** **May 29, 2012**

(54) **NONINVASIVE MULTI-PARAMETER
PATIENT MONITOR**

(75) Inventors: **Ammar Al-Ali**, Tustin, CA (US); **Joe Kiani**, Laguna Niguel, CA (US); **Mohamed Diab**, Mission Viejo, CA (US); **Greg Olsen**, Irvine, CA (US); **Roger Wu**, Irvine, CA (US); **Rick Fishel**, Orange, CA (US)

4,157,708 A 6/1979 Imura
4,167,331 A 9/1979 Nielsen
4,266,554 A 5/1981 Hamaguri
4,267,844 A 5/1981 Yamanishi
4,446,871 A 5/1984 Imura
4,531,527 A 7/1985 Reinhold, Jr. et al.
4,586,513 A 5/1986 Hamaguri
4,621,643 A 11/1986 Newet al.

(Continued)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Masimo Laboratories, Inc.**, Irvine, CA (US)

EP 41 92 23 3/1991
EP 0 569 670 2/1993
EP 0569670 11/1993

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1661 days.

(Continued)

OTHER PUBLICATIONS

(21) Appl. No.: **11/367,033**

International Search Report for PCT/US2006/007516, mailed on Jan. 11, 2007, in 4 pages.

(22) Filed: **Mar. 1, 2006**

(Continued)

(65) **Prior Publication Data**

US 2006/0226992 A1 Oct. 12, 2006

Primary Examiner — Eric Winakur

Assistant Examiner — Marjan Fardanes

(74) *Attorney, Agent, or Firm* — Knobbe Martens Olson & Bear LLP

Related U.S. Application Data

(60) Provisional application No. 60/657,596, filed on Mar. 1, 2005, provisional application No. 60/657,281, filed on Mar. 1, 2005, provisional application No. 60/657,268, filed on Mar. 1, 2005, provisional application No. 60/657,759, filed on Mar. 1, 2005.

(57) **ABSTRACT**

Embodiments of the present disclosure include a handheld multi-parameter patient monitor capable of determining multiple physiological parameters from the output of a light sensitive detector capable of detecting light attenuated by body tissue. For example, in an embodiment, the monitor is capable of advantageously and accurately displaying one or more of pulse rate, plethysmograph data, perfusion quality, signal confidence, and values of blood constituents in body tissue, including for example, arterial carbon monoxide saturation ("HbCO"), methemoglobin saturation ("HbMet"), total hemoglobin ("Hbt"), arterial oxygen saturation ("SpO₂"), fractional arterial oxygen saturation ("SpaO₂"), or the like. In an embodiment, the monitor advantageously includes a plurality of display modes enabling more parameter data to be displayed than the available physical display real estate.

(51) **Int. Cl.**

A61B 5/1455 (2006.01)

(52) **U.S. Cl.** **600/310; 600/323; 600/324; 600/326**


(58) **Field of Classification Search** **600/309–344**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,910,701 A 10/1975 Henderson et al.
3,998,550 A 12/1976 Konishi et al.
4,014,321 A * 3/1977 March 600/319

47 Claims, 18 Drawing Sheets

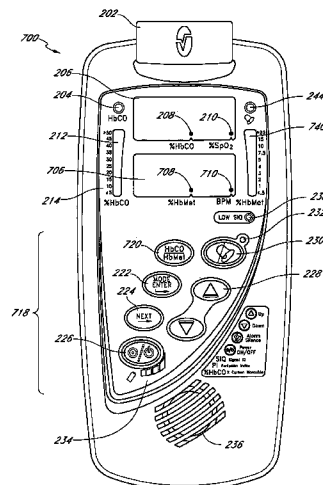

US 8,190,223 B2

Page 2

U.S. PATENT DOCUMENTS					
4,653,498 A	3/1987	New, et al.	D361,840 S	8/1995	Savage et al.
4,655,225 A	4/1987	Dahne et al.	D362,063 S	9/1995	Savage et al.
4,685,464 A	8/1987	Goldberger et al.	5,452,717 A	9/1995	Branigan et al.
4,694,833 A	9/1987	Hamaguri	D363,120 S	10/1995	Savage et al.
4,700,708 A	10/1987	New et al.	5,456,252 A	10/1995	Vari et al.
4,714,341 A	12/1987	Hamaguri et al.	RE35,122 E	12/1995	Corenman et al.
4,770,179 A	9/1988	New et al.	5,482,036 A	1/1996	Diab et al.
4,773,422 A	9/1988	Isaacson et al.	5,490,505 A	2/1996	Diab et al.
4,781,195 A	11/1988	Martin	5,490,523 A	2/1996	Isaacson et al.
4,800,885 A	1/1989	Johnson	5,494,032 A	2/1996	Robinson et al.
4,805,623 A	2/1989	Jobsis	5,494,043 A	2/1996	O'Sullivan et al.
4,832,484 A	5/1989	Aoyagi et al.	5,503,148 A	4/1996	Pologe et al.
4,846,183 A	7/1989	Martin	5,520,177 A	5/1996	Ogawa
4,863,265 A	9/1989	Flower et al.	5,533,507 A	7/1996	Potratz
4,867,571 A	9/1989	Frick et al.	5,533,511 A	7/1996	Kaspari et al.
4,869,254 A	9/1989	Stone et al.	5,551,423 A	9/1996	Sugiura
4,907,876 A	3/1990	Suzuki et al.	5,553,615 A	9/1996	Carim et al.
4,911,167 A	3/1990	Corenman et al.	5,555,882 A	9/1996	Richardson et al.
4,934,372 A	6/1990	Corenman et al.	5,561,275 A	10/1996	Savage et al.
4,938,218 A	7/1990	Goodman et al.	5,562,002 A	10/1996	Lalin
4,942,877 A	7/1990	Sakai et al.	5,575,284 A *	11/1996	Athan et al. 600/323
4,955,379 A	9/1990	Hall	5,577,500 A	11/1996	Potratz
4,960,126 A	10/1990	Conlon et al.	5,584,299 A	12/1996	Sakai et al.
4,960,128 A	10/1990	Gordon et al.	5,588,427 A	12/1996	Tien
4,964,010 A	10/1990	Miyasaka et al.	5,590,649 A	1/1997	Caro et al.
4,964,408 A	10/1990	Hink et al.	5,590,652 A	1/1997	Inai
4,967,571 A	11/1990	Sporri	5,595,176 A	1/1997	Yamaura
4,975,581 A	12/1990	Robinson et al.	5,596,992 A	1/1997	Haaland et al.
4,986,665 A	1/1991	Yamanishi et al.	5,602,924 A	2/1997	Durand et al.
4,997,769 A	3/1991	Lundsgaard	5,603,623 A	2/1997	Nishikawa et al.
5,025,791 A	6/1991	Niwa	5,630,413 A	5/1997	Thomas et al.
RE33,643 E	7/1991	Isaacson et al.	5,632,272 A	5/1997	Diab et al.
5,028,787 A	7/1991	Rosenthal et al.	5,638,816 A	6/1997	Kiani-Azarbayjany et al.
5,033,472 A	7/1991	Sato et al.	5,638,818 A	6/1997	Diab et al.
5,041,187 A	8/1991	Hink et al.	5,645,059 A	7/1997	Fein et al.
5,054,495 A	10/1991	Uemura et al.	5,645,060 A	7/1997	Yorkey
5,058,588 A	10/1991	Kaestle et al.	5,645,440 A	7/1997	Tobler et al.
5,069,213 A	12/1991	Polczynski	5,660,567 A	8/1997	Nierlich et al.
5,077,476 A	12/1991	Rosenthal	5,662,106 A	9/1997	Swedlow et al.
5,078,136 A	1/1992	Stone et al.	5,676,139 A	10/1997	Goldberger et al.
5,137,023 A	8/1992	Mendelson et al.	5,676,141 A	10/1997	Hollub
5,163,438 A	11/1992	Gordon et al.	5,678,544 A	10/1997	Delonzor et al.
5,189,609 A	2/1993	Tivig et al.	5,685,299 A	11/1997	Diab et al.
5,190,040 A	3/1993	Aoyagi	5,685,301 A	11/1997	Klomhaus
5,209,230 A	5/1993	Swedlow et al.	5,687,719 A	11/1997	Sato et al.
5,226,053 A	7/1993	Cho et al.	5,687,722 A	11/1997	Tien et al.
5,246,002 A	9/1993	Prosser	5,690,104 A	11/1997	Kanemoto et al.
5,247,931 A	9/1993	Norwood	5,692,503 A	12/1997	Kuenstner
5,259,381 A	11/1993	Cheung et al.	5,697,371 A	12/1997	Aoyagi
5,267,562 A	12/1993	Ukawa et al.	5,713,355 A	2/1998	Richardson et al.
5,267,563 A	12/1993	Swedlow et al.	5,719,589 A	2/1998	Norman et al.
5,278,627 A	1/1994	Aoyagi	5,720,284 A	2/1998	Aoyagi et al.
5,297,548 A	3/1994	Pologe	D393,830 S	4/1998	Tobler et al.
5,313,940 A	5/1994	Fuse et al.	5,743,262 A	4/1998	Lepper, Jr. et al.
5,331,549 A	7/1994	Crawford, Jr.	5,743,263 A	4/1998	Baker, Jr.
5,335,659 A	8/1994	Pologe et al.	5,746,206 A	5/1998	Mannheimer
5,337,744 A	8/1994	Branigan	5,746,697 A	5/1998	Swedlow et al.
5,337,745 A	8/1994	Benaron	5,752,914 A	5/1998	Delonzor et al.
5,341,805 A	8/1994	Stavridi et al.	5,755,226 A	5/1998	Carim et al.
5,348,004 A	9/1994	Hollub	5,758,644 A	6/1998	Diab et al.
5,351,685 A	10/1994	Potratz	5,760,910 A	6/1998	Lepper, Jr. et al.
5,355,880 A	10/1994	Thomas et al.	5,769,785 A	6/1998	Diab et al.
5,355,882 A	10/1994	Ukawa et al.	5,772,587 A	6/1998	Gratton et al.
5,361,758 A	11/1994	Hall et al.	5,779,630 A	7/1998	Fein et al.
5,368,224 A	11/1994	Richardson et al.	5,782,237 A	7/1998	Casciani et al.
D353,195 S	12/1994	Savage et al.	5,782,756 A	7/1998	Mannheimer
D353,196 S	12/1994	Savage et al.	5,782,757 A	7/1998	Diab et al.
5,377,676 A	1/1995	Vari et al.	5,785,659 A	7/1998	Caro et al.
5,385,143 A	1/1995	Aoyagi	5,790,729 A	8/1998	Pologe et al.
5,387,122 A	2/1995	Goldberger et al.	5,791,347 A	8/1998	Flaherty et al.
5,392,777 A	2/1995	Swedlow et al.	5,792,052 A	8/1998	Isaacson et al.
5,413,101 A	5/1995	Sugiura	5,793,485 A	8/1998	Gourley
D359,546 S	6/1995	Savage et al.	5,800,348 A	9/1998	Kaestle
5,421,329 A	6/1995	Casciani et al.	5,800,349 A	9/1998	Isaacson et al.
5,427,093 A	6/1995	Ogawa et al.	5,803,910 A	9/1998	Potratz
5,429,128 A	7/1995	Cadell et al.	5,807,246 A	9/1998	Sakaguchi et al.
5,431,170 A	7/1995	Mathews	5,807,247 A	9/1998	Merchant et al.
5,435,309 A	7/1995	Thomas et al.	5,810,723 A	9/1998	Aldrich
			5,810,724 A	9/1998	Gronvall

US 8,190,223 B2

Page 3

5,810,734 A	9/1998	Caro et al.	6,232,609 B1	5/2001	Snyder et al.
5,817,010 A	10/1998	Hibl	6,236,872 B1	5/2001	Diab et al.
5,818,985 A	10/1998	Merchant et al.	6,241,683 B1	6/2001	Macklem et al.
5,823,950 A	10/1998	Diab et al.	6,253,097 B1	6/2001	Aronow et al.
5,823,952 A	10/1998	Levinson et al.	6,256,523 B1	7/2001	Diab et al.
5,827,182 A	10/1998	Raley	6,262,698 B1	7/2001	Blum
5,830,131 A	11/1998	Caro et al.	6,263,222 B1	7/2001	Diab et al.
5,830,137 A	11/1998	Scharf	6,272,363 B1	8/2001	Casciani et al.
5,833,618 A	11/1998	Caro et al.	6,278,522 B1	8/2001	Lepper, Jr. et al.
5,839,439 A	11/1998	Nierlich et al.	6,280,213 B1	8/2001	Tobler et al.
RE36,000 E	12/1998	Swedlow et al.	6,285,895 B1	9/2001	Ristolainen et al.
5,842,979 A *	12/1998	Jarman 600/322	6,285,896 B1	9/2001	Tobler et al.
5,851,178 A	12/1998	Aronow	6,298,252 B1	10/2001	Kovach et al.
5,851,179 A	12/1998	Ritson et al.	6,304,675 B1	10/2001	Osbourne et al.
5,853,364 A	12/1998	Baker, Jr. et al.	6,304,767 B1	10/2001	Soller et al.
5,857,462 A	1/1999	Thomas et al.	6,321,100 B1	11/2001	Parker
5,860,919 A	1/1999	Kiani-Azarbayjany et al.	6,330,468 B1	12/2001	Scharf
5,865,736 A	2/1999	Baker, Jr. et al.	6,334,065 B1	12/2001	Al-Ali et al.
5,876,348 A	3/1999	Sugo	6,341,257 B1	1/2002	Haaland
5,885,213 A	3/1999	Richardson et al.	6,343,224 B1	1/2002	Parker
5,890,929 A	4/1999	Mills et al.	6,349,228 B1	2/2002	Kiani et al.
5,891,022 A	4/1999	Pologe	6,351,658 B1	2/2002	Middleman et al.
5,891,024 A	4/1999	Jarman et al.	6,356,774 B1	3/2002	Bernstein et al.
5,904,654 A	5/1999	Wohltmann et al.	6,360,113 B1	3/2002	Dettling
5,910,108 A	6/1999	Solenberger	6,360,114 B1	3/2002	Diab et al.
5,916,154 A	6/1999	Hobbs et al.	6,363,269 B1	3/2002	Hanna et al.
5,919,133 A	7/1999	Taylor	6,368,283 B1	4/2002	Xu et al.
5,919,134 A	7/1999	Diab	6,371,921 B1	4/2002	Caro et al.
5,921,921 A	7/1999	Potratz et al.	6,374,129 B1	4/2002	Chin et al.
5,934,277 A	8/1999	Mortz	6,377,828 B1	4/2002	Chaiken et al.
5,934,925 A	8/1999	Tobler et al.	6,377,829 B1	4/2002	Al-Ali
5,940,182 A	8/1999	Lepper, Jr. et al.	6,388,240 B2	5/2002	Schulz et al.
5,954,644 A	9/1999	Dettling	6,393,310 B1	5/2002	Kuenstner
5,978,691 A	11/1999	Mills	6,397,091 B2	5/2002	Diab et al.
5,983,122 A	11/1999	Jarman et al.	6,397,092 B1	5/2002	Norris et al.
5,995,855 A	11/1999	Kiani et al.	6,397,093 B1 *	5/2002	Aldrich 600/330
5,995,856 A	11/1999	Mannheimer et al.	6,408,198 B1	6/2002	Hanna et al.
5,995,859 A	11/1999	Takahashi	6,411,833 B1	6/2002	Baker, Jr. et al.
5,997,343 A	12/1999	Mills et al.	6,415,166 B1	7/2002	Van Hoy et al.
5,999,841 A	12/1999	Aoyagi et al.	6,415,233 B1	7/2002	Haaland
6,002,952 A	12/1999	Diab et al.	6,415,236 B2	7/2002	Kobayashi et al.
6,006,119 A	12/1999	Soller et al.	6,430,525 B1	8/2002	Weber et al.
6,011,986 A	1/2000	Diab et al.	6,434,408 B1	8/2002	Heckel
6,014,576 A	1/2000	Raley	6,441,388 B1	8/2002	Thomas et al.
6,018,673 A	1/2000	Chin et al.	6,453,184 B1	9/2002	Hyogo et al.
6,018,674 A	1/2000	Aronow	6,455,340 B1	9/2002	Chua et al.
6,023,541 A	2/2000	Merchant et al.	6,463,310 B1	10/2002	Swedlow et al.
6,027,452 A	2/2000	Flaherty et al.	6,463,311 B1	10/2002	Diab
6,036,642 A	3/2000	Diab et al.	6,466,824 B1	10/2002	Struble
6,045,509 A	4/2000	Caro et al.	6,470,199 B1	10/2002	Kopotic et al.
6,064,898 A	5/2000	Aldrich	6,480,729 B2	11/2002	Stone
6,067,462 A	5/2000	Diab et al.	6,490,466 B1	12/2002	Fein et al.
6,068,594 A	5/2000	Schloemer et al.	6,497,659 B1	12/2002	Rafert
6,073,037 A	6/2000	Alam et al.	6,501,974 B2	12/2002	Huiku
6,081,735 A	6/2000	Diab et al.	6,501,975 B2	12/2002	Diab et al.
6,083,172 A	7/2000	Baker, Jr. et al.	6,504,943 B1	1/2003	Sweatt et al.
6,088,607 A	7/2000	Diab et al.	6,505,059 B1	1/2003	Kollias et al.
6,094,592 A	7/2000	Yorkey et al.	6,505,060 B1	1/2003	Norris
6,104,938 A	8/2000	Huiku	6,505,061 B2	1/2003	Larson
6,110,522 A	8/2000	Lepper, Jr. et al.	6,505,133 B1	1/2003	Hanna
6,112,107 A	8/2000	Hannula	6,510,329 B2	1/2003	Heckel
6,122,042 A	9/2000	Wunderman et al.	6,515,273 B2	2/2003	Al-Ali
6,124,597 A	9/2000	Shehada et al.	6,519,486 B1	2/2003	Edgar, Jr. et al.
6,144,868 A	11/2000	Parker	6,519,487 B1	2/2003	Parker
6,149,588 A	11/2000	Noda et al.	6,522,398 B2	2/2003	Cadell et al.
6,151,516 A	11/2000	Kiani-Azarbayjany et al.	6,525,386 B1	2/2003	Mills et al.
6,151,518 A	11/2000	Hayashi	6,526,300 B1	2/2003	Kiani et al.
6,152,754 A	11/2000	Gerhardt et al.	6,526,301 B2	2/2003	Larsen et al.
6,154,667 A	11/2000	Miura et al.	6,528,809 B1	3/2003	Thomas et al.
6,157,041 A	12/2000	Thomas et al.	6,537,225 B1	3/2003	Mills
6,157,850 A	12/2000	Diab et al.	6,541,756 B2	4/2003	Schulz et al.
6,165,005 A	12/2000	Mills et al.	6,542,763 B1 *	4/2003	Yamashita et al. 600/310
6,174,283 B1	1/2001	Nevo et al.	6,542,764 B1	4/2003	Al-Ali et al.
6,184,521 B1	2/2001	Coffin, IV et al.	6,545,652 B1	4/2003	Tsuji
6,192,261 B1	2/2001	Gratton et al.	6,546,267 B1	4/2003	Sugiura
6,206,830 B1	3/2001	Diab et al.	6,553,241 B2	4/2003	Mannheimer et al.
6,226,539 B1	5/2001	Potratz	6,564,077 B2	5/2003	Mortara
6,229,856 B1	5/2001	Diab et al.	6,571,113 B1	5/2003	Fein et al.
6,230,035 B1	5/2001	Aoyagi et al.	6,580,086 B1	6/2003	Schulz et al.

US 8,190,223 B2

Page 4

6,582,964 B1	6/2003	Samsoondar et al.	6,770,028 B1	8/2004	Ali et al.
6,584,336 B1	6/2003	Ali et al.	6,771,994 B2	8/2004	Kiani et al.
6,584,413 B1	6/2003	Keenan et al.	6,773,397 B2	8/2004	Kelly
6,591,123 B2	7/2003	Fein et al.	6,778,923 B2	8/2004	Norris et al.
6,594,511 B2	7/2003	Stone et al.	6,780,158 B2	8/2004	Yarita
6,595,316 B2	7/2003	Cybulski et al.	6,788,849 B1	9/2004	Pawluczyk
6,597,932 B2	7/2003	Tian et al.	6,792,300 B1	9/2004	Diab et al.
6,597,933 B2	7/2003	Kiani et al.	6,800,373 B2	10/2004	Corczyca
6,600,940 B1	7/2003	Fein et al.	6,801,797 B2	10/2004	Mannheimer et al.
6,606,509 B2	8/2003	Schmitt	6,801,799 B2	10/2004	Mendelson
6,606,510 B2	8/2003	Swedlow et al.	6,810,277 B2	10/2004	Edgar, Jr. et al.
6,606,511 B1	8/2003	Ali et al.	6,813,511 B2	11/2004	Diab et al.
6,611,698 B1	8/2003	Yamashita et al.	6,816,741 B2	11/2004	Diab
6,614,521 B2	9/2003	Samsoondar et al.	6,819,950 B2	11/2004	Mills
6,615,064 B1	9/2003	Aldrich	6,822,564 B2	11/2004	Al-Ali
6,615,151 B1	9/2003	Seccina et al.	6,825,619 B2	11/2004	Norris
6,618,602 B2	9/2003	Levin	6,826,419 B2	11/2004	Diab et al.
6,622,095 B2	9/2003	Kobayashi et al.	6,829,496 B2	12/2004	Nagai et al.
6,628,975 B1	9/2003	Fein et al.	6,829,501 B2	12/2004	Nielsen et al.
6,631,281 B1	10/2003	Kastle	6,830,711 B2	12/2004	Mills et al.
6,632,181 B2	10/2003	Flaherty et al.	6,836,679 B2	12/2004	Baker, Jr. et al.
6,639,668 B1	10/2003	Trepagnier	6,839,579 B1	1/2005	Chin
6,640,116 B2	10/2003	Diab	6,839,580 B2	1/2005	Zonios et al.
6,643,530 B2	11/2003	Diab et al.	6,839,582 B2	1/2005	Heckel
6,650,917 B2	11/2003	Diab et al.	6,842,702 B2	1/2005	Haaland et al.
6,654,623 B1	11/2003	Kastle	6,845,256 B2	1/2005	Chin et al.
6,654,624 B2	11/2003	Diab et al.	6,847,835 B1	1/2005	Yamanishi
6,657,717 B2	12/2003	Cadell et al.	6,850,787 B2	2/2005	Weber et al.
6,658,276 B2	12/2003	Kianl et al.	6,850,788 B2	2/2005	Al-Ali
6,658,277 B2	12/2003	Wasserman	6,852,083 B2	2/2005	Caro et al.
6,661,161 B1	12/2003	Lanzo et al.	6,861,639 B2	3/2005	Al-Ali
6,662,033 B2	12/2003	Casciani et al.	6,861,641 B1	3/2005	Adams
6,665,551 B1	12/2003	Suzuki	6,869,402 B2	3/2005	Arnold
6,668,183 B2	12/2003	Hicks et al.	6,882,874 B2	4/2005	Huiku
6,671,526 B1	12/2003	Aoyagi et al.	6,898,452 B2	5/2005	Al-Ali et al.
6,671,531 B2	12/2003	Al-Ali et al.	6,912,049 B2	6/2005	Pawluczyk et al.
6,675,031 B1	1/2004	Porges et al.	6,917,422 B2	7/2005	Samsoondar et al.
6,675,106 B1	1/2004	Keenan et al.	6,919,566 B1	7/2005	Cadell
6,678,543 B2	1/2004	Diab et al.	6,920,345 B2	7/2005	Al-Ali et al.
6,681,126 B2	1/2004	Solenberger	6,921,367 B2	7/2005	Mills
6,684,090 B2	1/2004	Ali et al.	6,922,645 B2	7/2005	Haaland et al.
6,684,091 B2	1/2004	Parker	6,928,311 B1	8/2005	Pawluczyk et al.
6,687,620 B1	2/2004	Haaland et al.	6,931,268 B1	8/2005	Kiani-Azarbayjany et al.
6,690,466 B2	2/2004	Miller et al.	6,931,269 B2	8/2005	Terry
6,694,157 B1	2/2004	Stone et al.	6,934,570 B2	8/2005	Kiani et al.
6,697,655 B2	2/2004	Sueppel et al.	6,939,305 B2	9/2005	Flaherty et al.
6,697,656 B1	2/2004	Al-Ali	6,943,348 B1	9/2005	Coffin, IV
6,697,657 B1	2/2004	Shehada et al.	6,944,487 B2	9/2005	Maynard et al.
6,697,658 B2	2/2004	Al-Ali	6,950,687 B2	9/2005	Al-Ali
RE38,476 E	3/2004	Diab et al.	6,956,572 B2	10/2005	Zaleski
6,699,194 B1	3/2004	Diab et al.	6,961,598 B2	11/2005	Diab
6,701,170 B2	3/2004	Stetson	6,970,792 B1	11/2005	Diab
6,708,049 B1	3/2004	Berson et al.	6,975,891 B2	12/2005	Pawluczyk
6,711,503 B2	3/2004	Haaland	6,979,812 B2	12/2005	Al-Ali
6,714,803 B1	3/2004	Mortz	6,985,764 B2	1/2006	Mason et al.
6,714,804 B2	3/2004	Al-Ali et al.	6,987,994 B1	1/2006	Mortz
6,714,805 B2	3/2004	Jeon et al.	6,993,371 B2	1/2006	Kiani et al.
RE38,492 E	4/2004	Diab et al.	6,996,427 B2	2/2006	Ali et al.
6,719,705 B2	4/2004	Mills	6,999,904 B2	2/2006	Weber et al.
6,720,734 B2	4/2004	Norris	7,001,337 B2	2/2006	Dekker
6,721,582 B2	4/2004	Trepagnier et al.	7,003,338 B2	2/2006	Weber et al.
6,721,584 B2	4/2004	Baker, Jr. et al.	7,003,339 B2	2/2006	Diab et al.
6,721,585 B1	4/2004	Parker	7,006,856 B2	2/2006	Baker, Jr. et al.
6,725,074 B1	4/2004	Kastle	7,015,451 B2	3/2006	Dalke et al.
6,725,075 B2	4/2004	Al-Ali	7,024,233 B2	4/2006	Al et al.
6,726,634 B2	4/2004	Freeman	7,027,849 B2	4/2006	Al-Ali
6,728,560 B2	4/2004	Kollias et al.	7,030,749 B2	4/2006	Al-Ali
6,735,459 B2	5/2004	Parker	7,039,449 B2	5/2006	Al-Ali
6,741,875 B1	5/2004	Pawluczyk et al.	7,041,060 B2	5/2006	Flaherty et al.
6,741,876 B1	5/2004	Seccina et al.	7,044,918 B2	5/2006	Diab
6,743,172 B1	6/2004	Blike	7,067,893 B2	6/2006	Mills et al.
6,745,060 B2	6/2004	Diab et al.	7,096,052 B2	8/2006	Mason et al.
6,745,061 B1	6/2004	Hicks et al.	7,096,054 B2	8/2006	Abdul-Hafiz et al.
6,748,253 B2	6/2004	Norris et al.	7,132,641 B2	11/2006	Schulz et al.
6,748,254 B2	6/2004	Chin et al.	7,142,901 B2	11/2006	Kiani et al.
6,754,515 B1	6/2004	Pologe	7,149,561 B2	12/2006	Diab
6,754,516 B2	6/2004	Mannheimer	7,186,966 B2	3/2007	Al-Ali
6,760,607 B2	7/2004	Al-Ali	7,190,261 B2	3/2007	Al-Ali
6,760,609 B2	7/2004	Jacques	7,215,984 B2	5/2007	Diab et al.

US 8,190,223 B2

Page 5

7,215,986 B2	5/2007	Diab et al.	2002/0082488 A1	6/2002	Al-Ali et al.	
7,221,971 B2	5/2007	Diab et al.	2002/0095078 A1	7/2002	Mannheimer et al.	
7,225,006 B2	5/2007	Al-Ali et al.	2002/0111748 A1	8/2002	Kobayashi et al.	
7,225,007 B2	5/2007	Al-Ali et al.	2002/0115919 A1	8/2002	Al-Ali	
RE39,672 E	6/2007	Shehada et al.	2002/0154665 A1	10/2002	Funabashi et al.	
7,239,905 B2	7/2007	Kiani-Azarbayjany et al.	2002/0156353 A1	10/2002	Larson	
7,245,953 B1	7/2007	Parker	2002/0159002 A1	10/2002	Chang	
7,254,429 B2	8/2007	Schurman et al.	2002/0161291 A1 *	10/2002	Kiani et al.	600/324
7,254,431 B2	8/2007	Al-Ali et al.	2002/0165440 A1	11/2002	Mason et al.	
7,254,433 B2	8/2007	Diab et al.	2002/0183819 A1	12/2002	Struble	
7,254,434 B2	8/2007	Schulz et al.	2003/0045784 A1	3/2003	Palatnik et al.	
7,272,425 B2	9/2007	Al-Ali	2003/0045785 A1	3/2003	Diab et al.	
7,274,955 B2	9/2007	Kiani et al.	2003/0049232 A1	3/2003	Page et al.	
D554,263 S	10/2007	Al-Ali et al.	2003/0109775 A1	6/2003	O'Neil et al.	
7,280,858 B2	10/2007	Al-Ali et al.	2003/0116769 A1	6/2003	Song et al.	
7,289,835 B2	10/2007	Mansfield et al.	2003/0117296 A1	6/2003	Seely	
7,292,883 B2	11/2007	De Felice et al.	2003/0120160 A1	6/2003	Yarita	
7,295,866 B2	11/2007	Al-Ali	2003/0120164 A1 *	6/2003	Nielsen et al.	600/513
7,299,080 B2	11/2007	Acosta et al.	2003/0135099 A1	7/2003	Al-Ali	
7,328,053 B1	2/2008	Diab et al.	2003/0139657 A1	7/2003	Solenberger	
7,332,784 B2	2/2008	Mills et al.	2003/0160257 A1	8/2003	Bader et al.	
7,340,287 B2	3/2008	Mason et al.	2003/0195402 A1	10/2003	Fein et al.	
7,341,559 B2	3/2008	Schulz et al.	2004/0006261 A1	1/2004	Swedlow et al.	
7,343,186 B2	3/2008	Lamego et al.	2004/0033618 A1	2/2004	Haass et al.	
D566,282 S	4/2008	Al-Ali et al.	2004/0034898 A1	2/2004	Bruegl	
7,355,512 B1	4/2008	Al-Ali	2004/0059209 A1	3/2004	Al-Ali et al.	
7,356,365 B2	4/2008	Schurman	2004/0064259 A1	4/2004	Haaland et al.	
7,371,981 B2	5/2008	Abdul-Hafiz	2004/0081621 A1	4/2004	Arndt et al.	
7,373,193 B2	5/2008	Al-Ali et al.	2004/0092805 A1	5/2004	Yarita	
7,373,194 B2	5/2008	Weber et al.	2004/0133087 A1	7/2004	Ali et al.	
7,376,453 B1	5/2008	Diab et al.	2004/0138538 A1	7/2004	Stetson	
7,377,794 B2	5/2008	Al-Ali et al.	2004/0138540 A1	7/2004	Baker, Jr. et al.	
7,377,899 B2	5/2008	Weber et al.	2004/0147822 A1	7/2004	Al-Ali et al.	
7,383,070 B2	6/2008	Diab et al.	2004/0147823 A1	7/2004	Kiani et al.	
7,415,297 B2	8/2008	Al-Ali et al.	2004/0158132 A1	8/2004	Zaleski	
7,428,432 B2	9/2008	Ali et al.	2004/0158134 A1	8/2004	Diab et al.	
7,438,683 B2	10/2008	Al-Ali et al.	2004/0158135 A1	8/2004	Baker, Jr. et al.	
7,440,787 B2	10/2008	Diab	2004/0162472 A1	8/2004	Berson et al.	
7,454,240 B2	11/2008	Diab et al.	2004/0167382 A1	8/2004	Gardner et al.	
7,467,002 B2	12/2008	Weber et al.	2004/0176670 A1	9/2004	Takamura et al.	
7,469,157 B2	12/2008	Diab et al.	2004/0181134 A1	9/2004	Baker, Jr. et al.	
7,471,969 B2	12/2008	Diab et al.	2004/0199063 A1	10/2004	O'Neil et al.	
7,471,971 B2	12/2008	Diab et al.	2004/0204639 A1	10/2004	Casciani et al.	
7,483,729 B2	1/2009	Al-Ali et al.	2004/0204868 A1	10/2004	Maynard et al.	
7,483,730 B2	1/2009	Diab et al.	2004/0229391 A1	11/2004	Ohya et al.	
7,489,958 B2	2/2009	Diab et al.	2004/0262046 A1 *	12/2004	Simond et al.	177/25.13
7,496,391 B2	2/2009	Diab et al.	2004/0267103 A1	12/2004	Li et al.	
7,496,393 B2	2/2009	Diab et al.	2004/0267140 A1	12/2004	Ito et al.	
D587,657 S	3/2009	Al-Ali et al.	2005/0011488 A1	1/2005	Doucet	
7,499,741 B2	3/2009	Diab et al.	2005/0033128 A1	2/2005	Ali et al.	
7,499,835 B2	3/2009	Weber et al.	2005/0043902 A1	2/2005	Haaland et al.	
7,500,950 B2	3/2009	Al-Ali et al.	2005/0049469 A1	3/2005	Aoyagi et al.	
7,509,154 B2	3/2009	Diab et al.	2005/0054908 A1	3/2005	Blank et al.	
7,509,494 B2	3/2009	Al-Ali	2005/0070773 A1	3/2005	Chin et al.	
7,510,849 B2	3/2009	Schurman et al.	2005/0070775 A1	3/2005	Chin et al.	
7,526,328 B2	4/2009	Diab et al.	2005/0075546 A1	4/2005	Samsoondar et al.	
7,530,942 B1	5/2009	Diab	2005/0085704 A1	4/2005	Schulz et al.	
7,530,949 B2	5/2009	Al-Ali et al.	2005/0085735 A1	4/2005	Baker et al.	
7,530,955 B2	5/2009	Diab et al.	2005/0124871 A1	6/2005	Baker et al.	
7,563,110 B2	7/2009	Al-Ali et al.	2005/0143634 A1	6/2005	Baker et al.	
7,596,398 B2	9/2009	Al-Ali et al.	2005/0143943 A1	6/2005	Brown	
7,618,375 B2	11/2009	Flaherty et al.	2005/0148834 A1	7/2005	Hull et al.	
D606,659 S	12/2009	Kiani et al.	2005/0184895 A1	8/2005	Petersen et al.	
7,647,083 B2	1/2010	Al-Ali et al.	2005/0187447 A1	8/2005	Chew et al.	
D609,193 S	2/2010	Al-Ali et al.	2005/0187448 A1	8/2005	Petersen et al.	
D614,305 S	4/2010	Al-Ali et al.	2005/0187449 A1	8/2005	Chew et al.	
RE41,317 E	5/2010	Parker	2005/0187450 A1	8/2005	Chew et al.	
7,729,733 B2	6/2010	Al-Ali et al.	2005/0187452 A1	8/2005	Petersen et al.	
7,734,320 B2	6/2010	Al-Ali	2005/0187453 A1	8/2005	Petersen et al.	
7,899,507 B2	3/2011	Al-Ali et al.	2005/0197549 A1	9/2005	Baker Jr.	
7,957,780 B2	6/2011	Lamego et al.	2005/0197579 A1	9/2005	Baker Jr.	
2001/0044700 A1	11/2001	Koboyashi et al.	2005/0197793 A1	9/2005	Baker Jr.	
2001/0045532 A1	11/2001	Schulz et al.	2005/0203357 A1	9/2005	Debreczeny et al.	
2002/0021269 A1	2/2002	Rast	2005/0209515 A1	9/2005	Hockersmith et al.	
2002/0026107 A1	2/2002	Kiani et al.	2005/0228253 A1	10/2005	Debreczeny	
2002/0035318 A1	3/2002	Mannheimer et al.	2005/0250997 A1	11/2005	Takeda et al.	
2002/0038078 A1	3/2002	Ito	2006/0030764 A1	2/2006	Porges et al.	
2002/0038081 A1	3/2002	Fein et al.	2006/0210120 A1	9/2006	Rowe et al.	
2002/0059047 A1	5/2002	Haaland	2006/0211922 A1	9/2006	Al-Ali et al.	

US 8,190,223 B2

Page 6

2006/0211923	A1	9/2006	Al-Ali et al.
2006/0211924	A1	9/2006	Smith et al.
2006/0211925	A1	9/2006	Lamego et al.
2006/0211932	A1	9/2006	Al-Ali et al.
2006/0226992	A1	10/2006	Al-Ali et al.
2006/0229509	A1	10/2006	Al-Ali et al.
2006/0238358	A1	10/2006	Al-Ali et al.
2006/0241358	A1	10/2006	Al-Ali et al.
2006/0241363	A1	10/2006	Al-Ali et al.
2011/0009719	A1	1/2011	Al-Ali et al.
2011/0237914	A1	9/2011	Lamego et al.

FOREIGN PATENT DOCUMENTS

EP	0 675 541	10/1995
EP	1 895 892	5/2010
EP	2 305 104	4/2011
JP	61-28172	2/1986
JP	63-275327	11/1988
JP	64-500495	2/1989
JP	2-145457	12/1990
JP	05-207993	8/1993
JP	6-505903	7/1994
JP	6-237013	8/1994
JP	7-281618	10/1995
JP	07-325546	12/1995
JP	9-192120	7/1997
JP	10-216112	8/1998
JP	10-509352	9/1998
JP	10-269344 A	10/1998
JP	10-295676	11/1998
JP	10-305026	11/1998
JP	11-163412	6/1999
JP	11-164826	6/1999
JP	11-506834	6/1999
JP	11-183377	7/1999
JP	2000-116625	4/2000
JP	2002-516689	6/2002
JP	2002-228579	8/2002
JP	2002-525151	8/2002
JP	2002-315739	10/2002
JP	2003-507718	2/2003
JP	2003-084108	3/2003
JP	2003-521985	7/2003
JP	2004-070179	3/2004
JP	2004-226277	8/2004
JP	2004-296736	10/2004
JP	2004-532526	10/2004
JP	2004-327760	11/2004
JP	2005-501589	1/2005
JP	2005-253478	9/2005
JP	4879913	12/2011
WO	WO 88/01150	2/1988
WO	WO 88/02020	2/1988
WO	WO 92/16142	10/1992
WO	WO 95/16387	6/1995
WO	WO 96/13208	5/1996
WO	WO 97/01985	1/1997
WO	WO 98/43071	10/1998
WO	WO 98-43071	10/1998
WO	WO 00/18290	4/2000
WO	WO 00/42911 A1	7/2000
WO	WO 00/59374	10/2000
WO	WO 01/13790	3/2001
WO	WO 01/30414	5/2001
WO	WO 01/58347	8/2001
WO	WO 02/17780	3/2002
WO	WO 02/26123	4/2002
WO	WO 02/089664	11/2002
WO	WO 03/020129	3/2003
WO	WO 03/068060	8/2003
WO	WO 03-068060	8/2003
WO	WO 2004/034898	4/2004
WO	WO 2005/011488	2/2005
WO	WO 2006/094168	9/2006

OTHER PUBLICATIONS

Schmitt, Joseph M.; Zhou, Guan-Xiong; Miller, Justin, *Measurement of Blood Hematocrit by Dual-wavelength Near-IR Photoplethysmography*, published May 1992, Proc. SPIE vol. 1641,

p. 150-161, Physiological Monitoring and Early Detection Diagnostic Methods, Thomas S. Mang; Ed. (SPIE homepage), in 12 pages.
 Patent Cooperation Treaty (PCT) International Search Report; PCT/US 2006/007389; Date of Mailing Jul. 17, 2006; pp. 1-9.
 PCT International Search Report; PCT/US2006/007537; Date of Mailing Jul. 17, 2006; pp. 1-10.
 PCT International Search Report; PCT/US2006/007388; Date of Mailing Jul. 17, 2006; pp. 1-9.
 PCT International Search Report; PCT/US2006/007538; Date of Mailing Jul. 17, 2006; pp. 1-9.
 PCT International Search Report; PCT/US2006/007958; Date of Mailing Jul. 17, 2006; pp. 1-8.
 PCT International Search Report; PCT/US2006/007536; Date of Mailing Jul. 17, 2006; pp. 1-9.
 PCT International Search Report; PCT/US2006/007540; Date of Mailing Jul. 17, 2006; pp. 1-9.
 PCT International Search Report; PCT/US2006/007539; Date of Mailing Jul. 17, 2006; pp. 1-9.
 PCT International Search Report; PCT/US2006/007387; Date of Mailing Jul. 17, 2006; pp. 1-9.
 Burritt, Mary F.; Current Analytical Approaches to Measuring Blood Analytes; vol. 36; No. 8(B); 1990.
 European Examination Report dated Mar. 18, 2011, re EP App. No. 08 744 412.1-2319.
 European Examination Report dated Sep. 2, 2010, re EP App. No. 08 744 412.1-2319.
 European Extended Search Report re EPO App. No. 10162402.1, SR dated Aug. 9, 2010.
 Hall, et al., Jeffrey W.; Near-Infrared Spectrophotometry: A New Dimension in Clinical Chemistry; vol. 38; No. 9; 1992.
 Japanese First Office Action (Notice of Reasons for Rejection), re JP App. No. 2007-558207, dated Jun. 28, 2011.
 Japanese First Office Action (Notice of Reasons for Rejection), re JP App. No. 2007-558247, dated Jun. 28, 2011.
 Japanese Office Action (Notice of Reasons for Rejection) re JP App. No. 2007-558246, dated Jun. 28, 2011.
 Japanese Office Action (Notice of Reasons for Rejection), re JP App. No. 2007-558238, dated Jun. 28, 2011.
 Japanese Office Action re JP Application No. 2007-558249, dated Jul. 13, 2011.
 Japanese Office Action, re JP Application No. 2007-558237, dated Aug. 1, 2011.
 Kuenstner, et al., J. Todd; Measurement of Hemoglobin in Unlysed Blood by Near-Infrared Spectroscopy; vol. 48; No. 4, 1994.
 Manzke, et al., B., Multi Wavelength Pulse Oximetry in the Measurement of Hemoglobin Fractions; vol. 2676, date unknown.
 Naumenko, E. K.; Choice of Wavelengths for Stable Determination of Concentrations of Hemoglobin Derivatives from Absorption Spectra of Erythrocytes; vol. 63; No. 1; pp. 60-66 Jan.-Feb. 1996; Original article submitted Nov. 3, 1994.
 PCT Search Report of International Application No. PCT/US2008/058327, Mailing Date of Jun. 30, 2009, in 12 pages.
 PCT Search Report of International Application No. PCT/US2008/058327, Mailing Date of Aug. 12, 2008, in 6 pages.
 Schmitt, Joseph M.; Simple Photon Diffusion Analysis of the Effects of Multiple Scattering on Pulse Oximetry; Mar. 14, 1991; revised Aug. 30, 1991.
 Schnapp, et al., L.M.; Pulse Oximetry. Uses and Abuses.; Chest 1990; 98; 1244-1250001 10.1378/Chest.98.5.1244.
 European Examination Report dated Apr. 1, 2010, re EP App. No. 08 744 412.1 - 2319.
 European Examination Report dated Mar. 18, 2011, re EP App. No. 08 744 412.1 - 2319.
 International Search Report for PCT-US2006-007516, mailed on Jan. 11, 2007, in 4 pages.
 Japanese Office Action (Notice of Allowance), re JP App. No. 2007-558247, dated Oct. 24, 2011.
 Japanese Office Action re JP Application No. 2007-558249, dated Nov. 8, 2011.
 Japanese Office Action re JP Application No. JP 2007-558208, dated Aug. 23, 2011.

US 8,190,223 B2

Page 7

Japanese Office Action re JP Application No. JP 2007-558248, dated Nov. 8, 2011.

Japanese Office Action re JP Application No. 2007-558209, dated Oct. 25, 2011.

Japanese Office Action re JP Application No. 2007-558245, dated Oct. 25, 2011.

Patent Cooperation Treaty (PCT) International Search Report; PCT-US 2006-007389; Date of Mailing Jul. 17, 2006; pp. 1-9.

PCT International Search Report; PCT/US2006/007506; Date of Mailing Jul. 17, 2006; pp. 1-10.


* cited by examiner

U.S. Patent

May 29, 2012

Sheet 1 of 18

US 8,190,223 B2

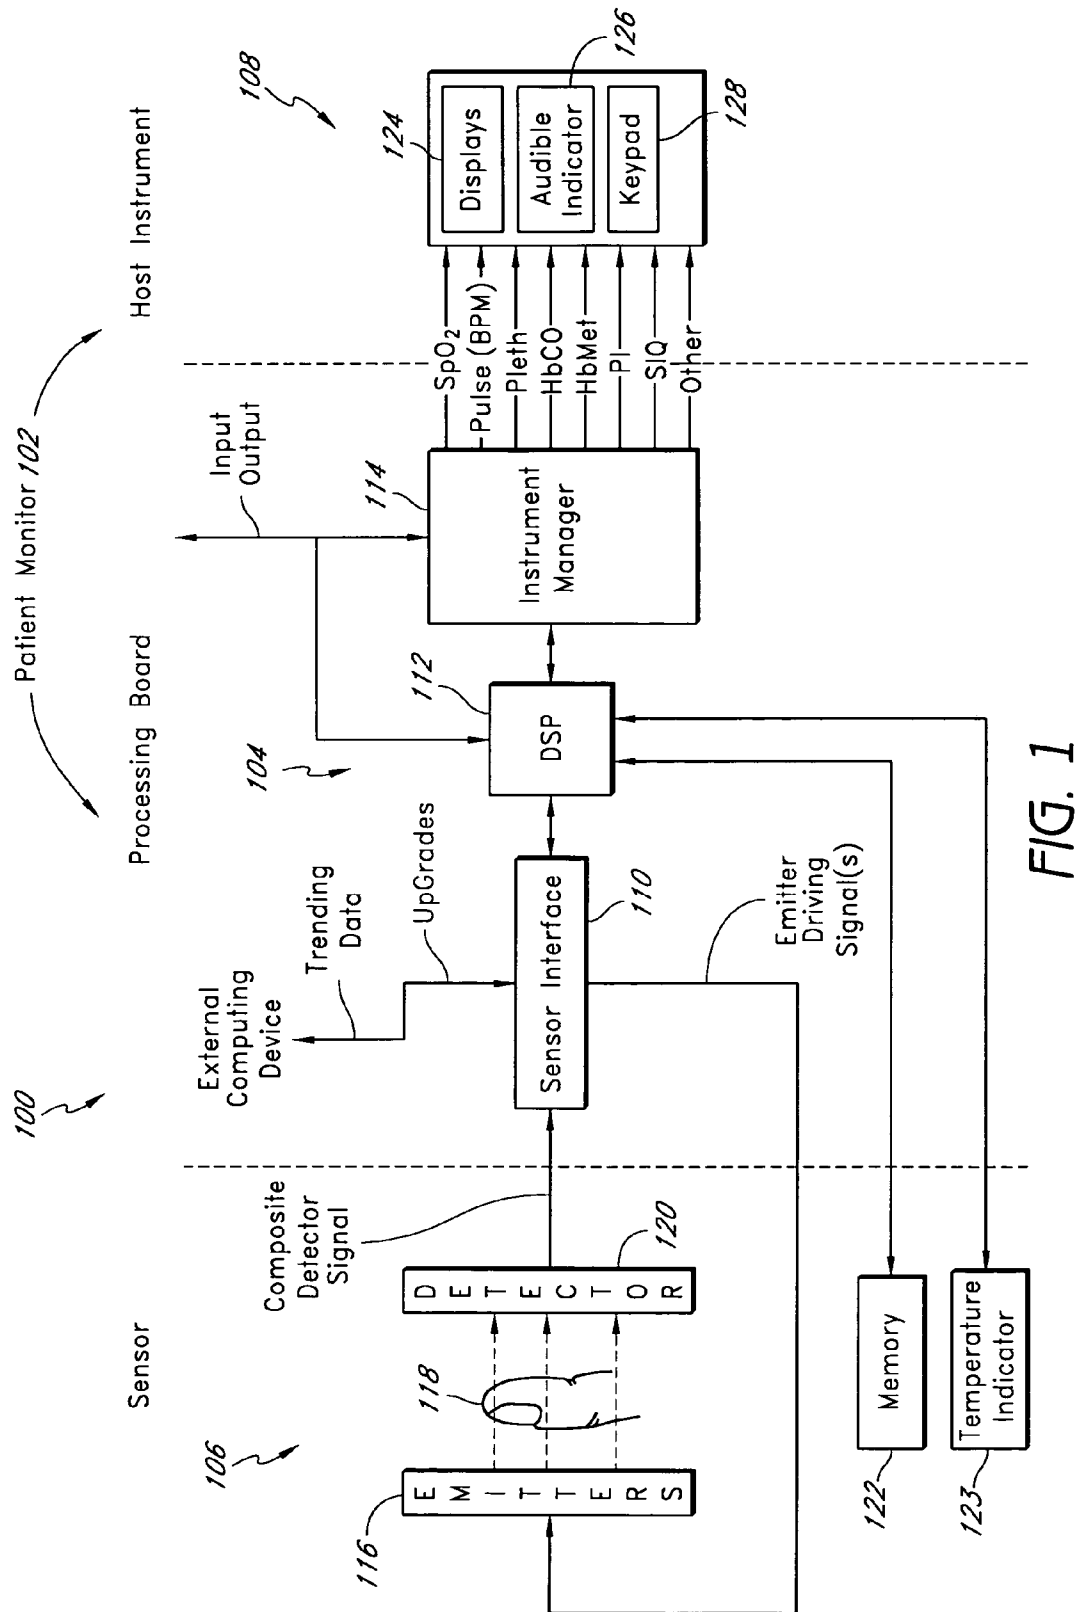

U.S. Patent

May 29, 2012

Sheet 2 of 18

US 8,190,223 B2

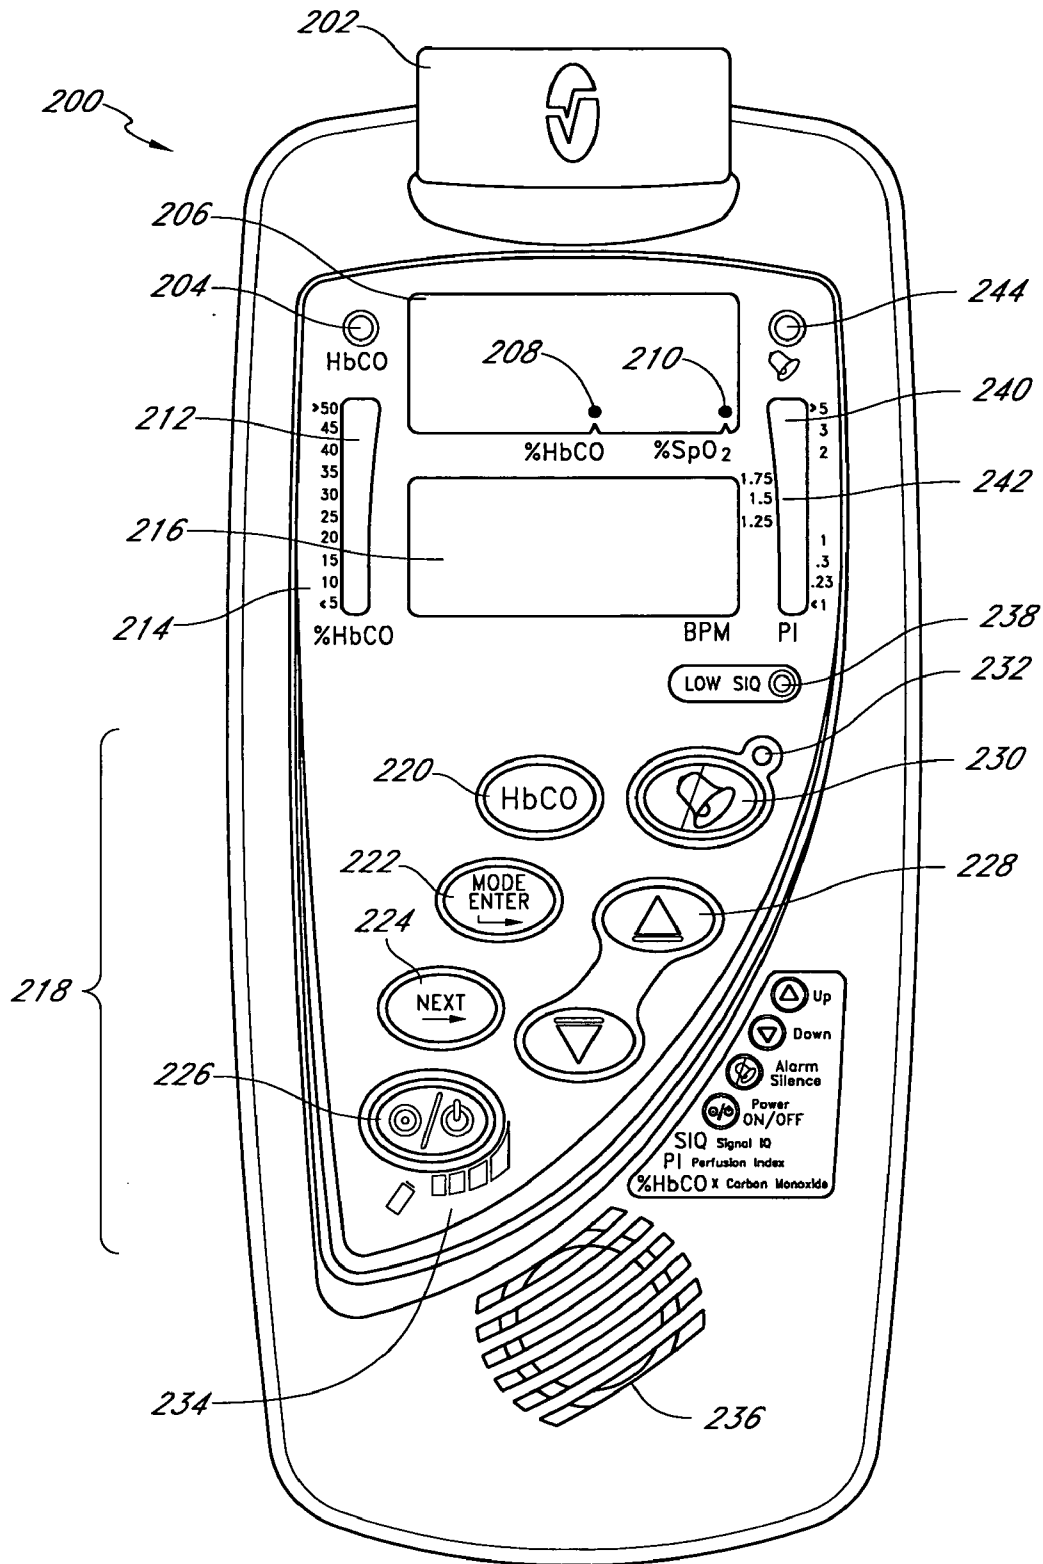


FIG. 2

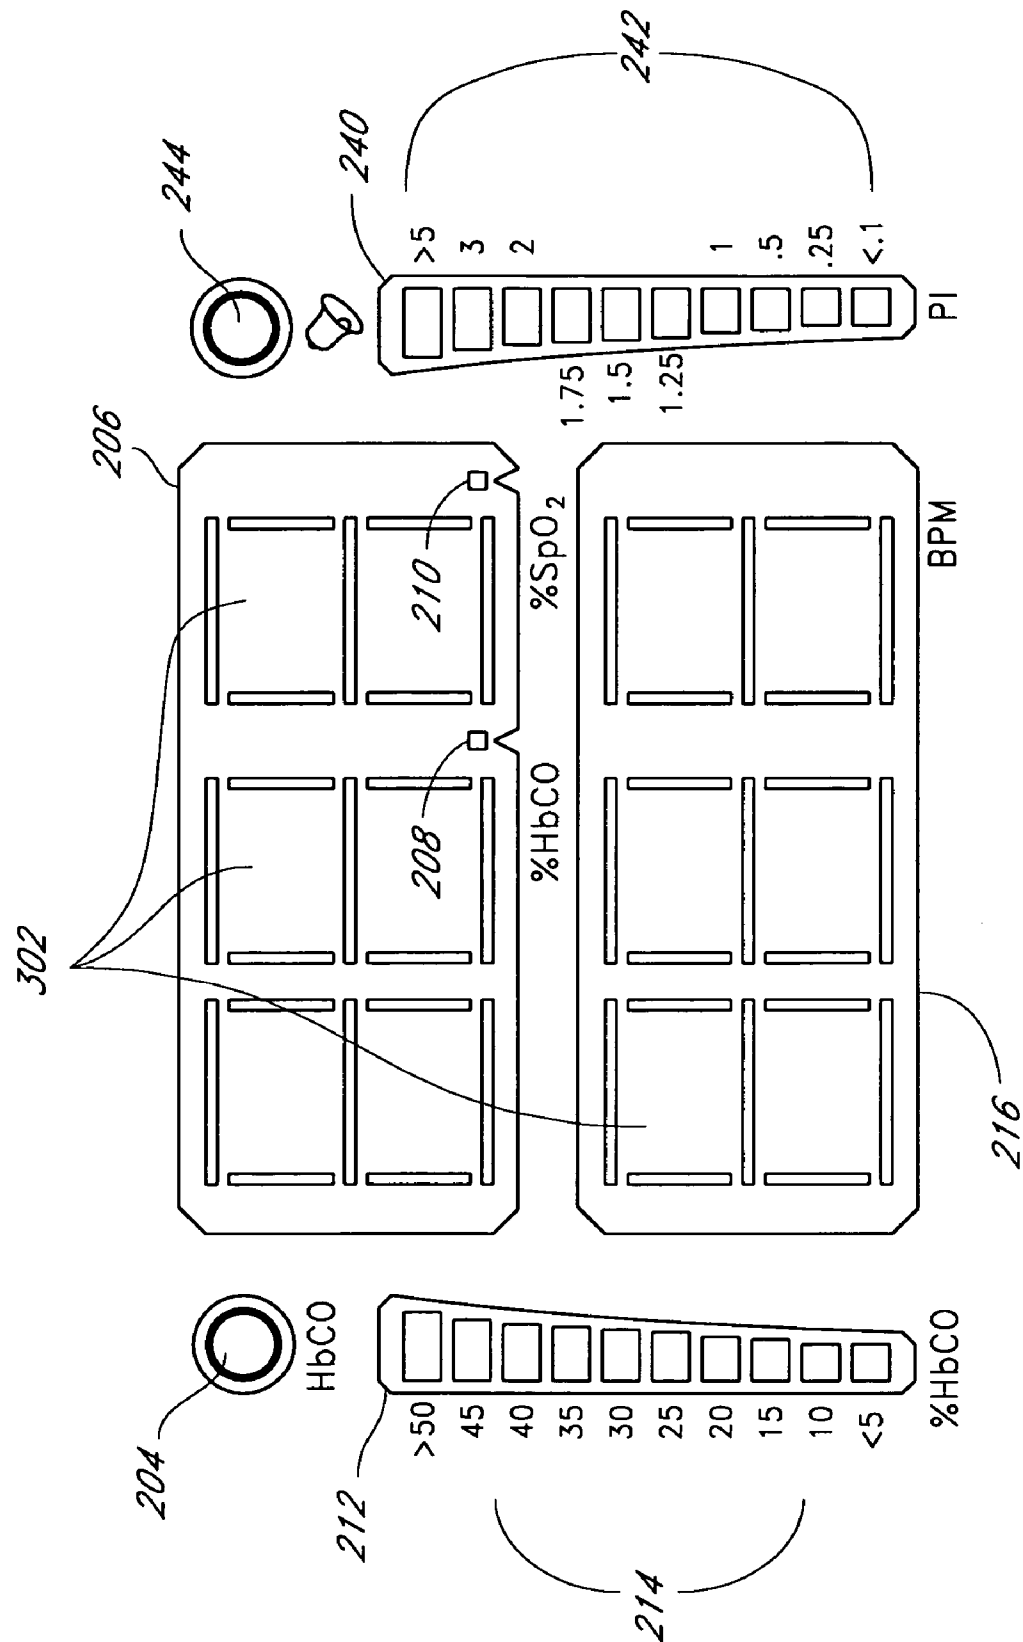


FIG. 3

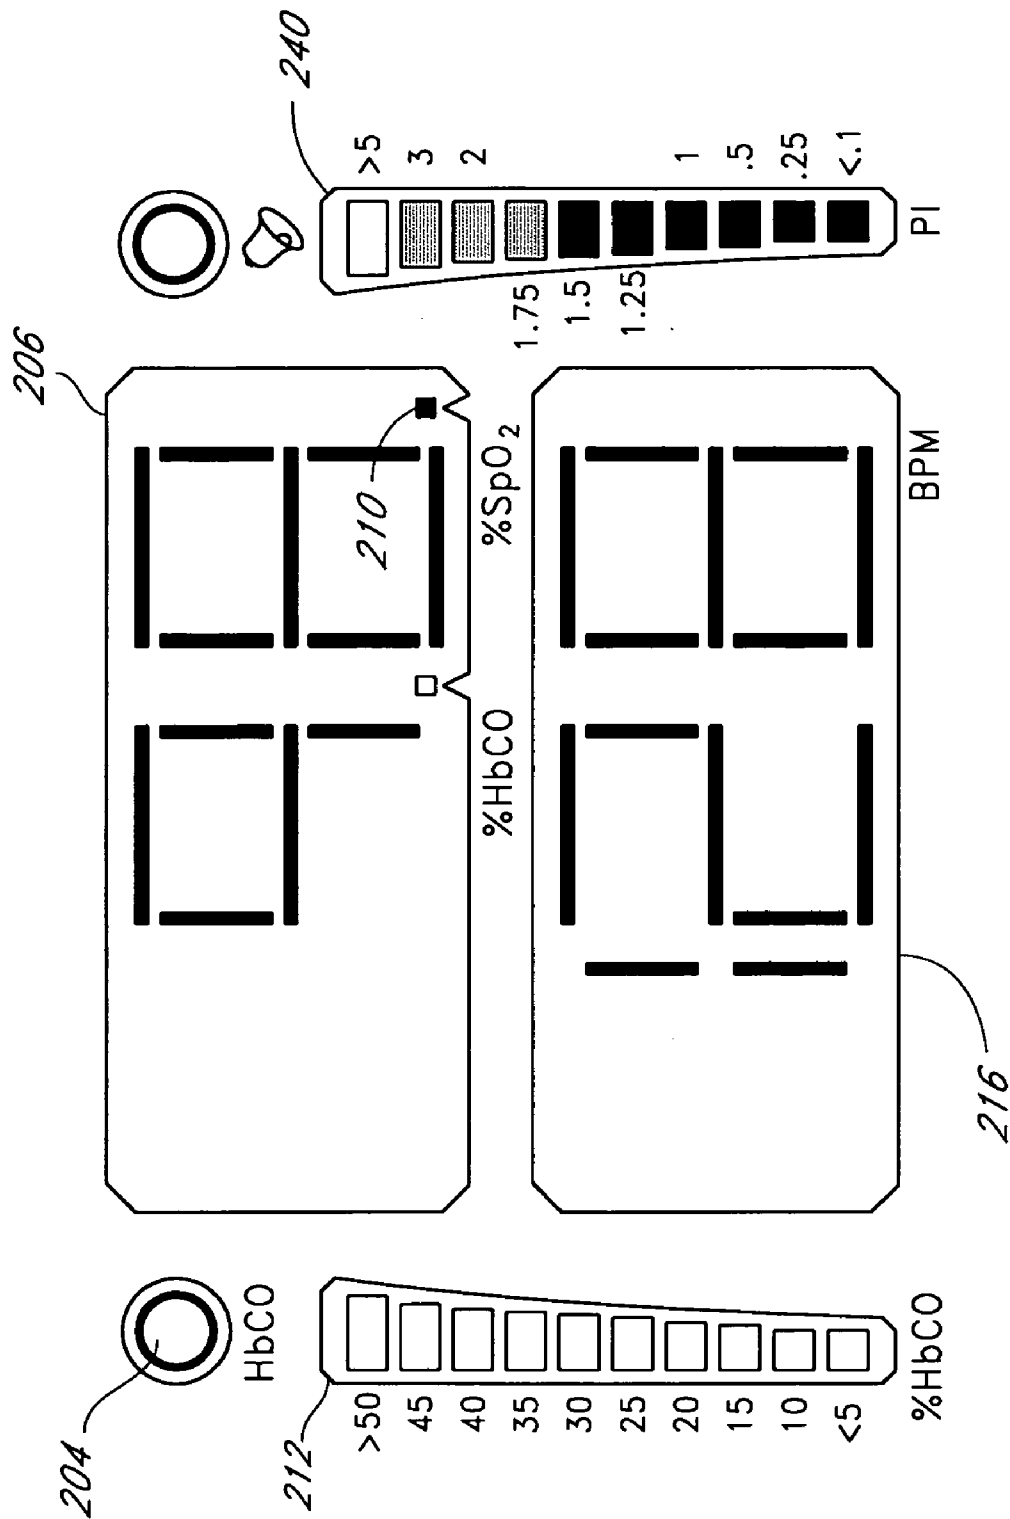


FIG. 4

U.S. Patent

May 29, 2012

Sheet 5 of 18

US 8,190,223 B2

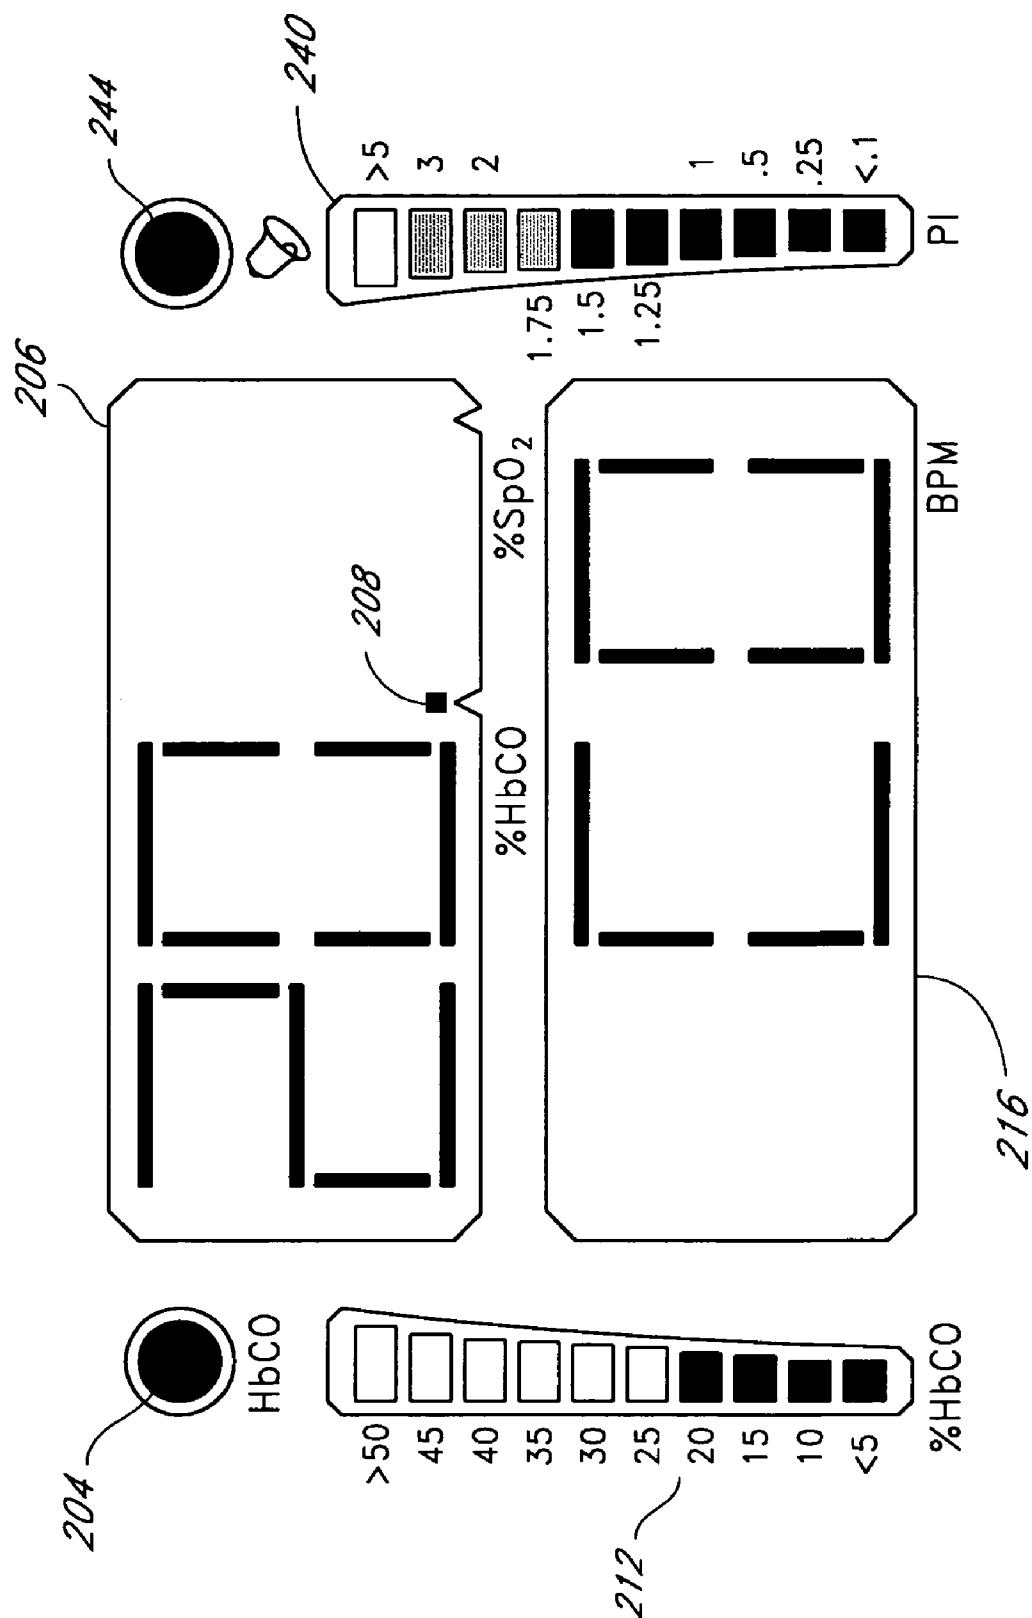


FIG. 5

U.S. Patent

May 29, 2012

Sheet 6 of 18

US 8,190,223 B2

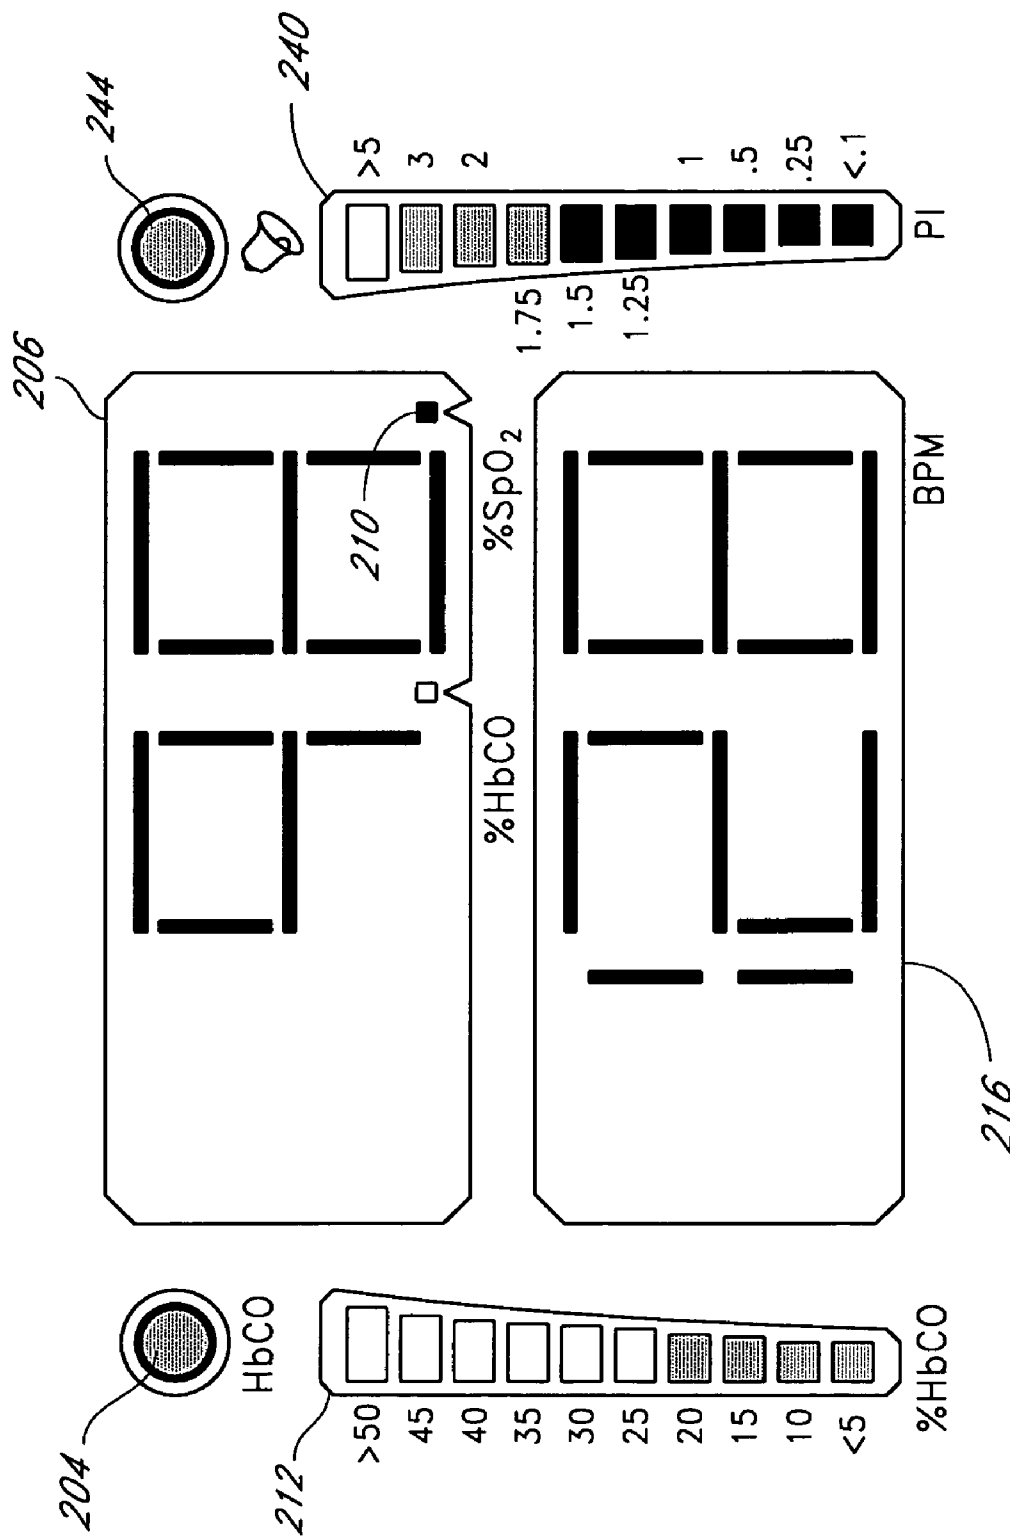


FIG. 6

U.S. Patent

May 29, 2012

Sheet 7 of 18

US 8,190,223 B2

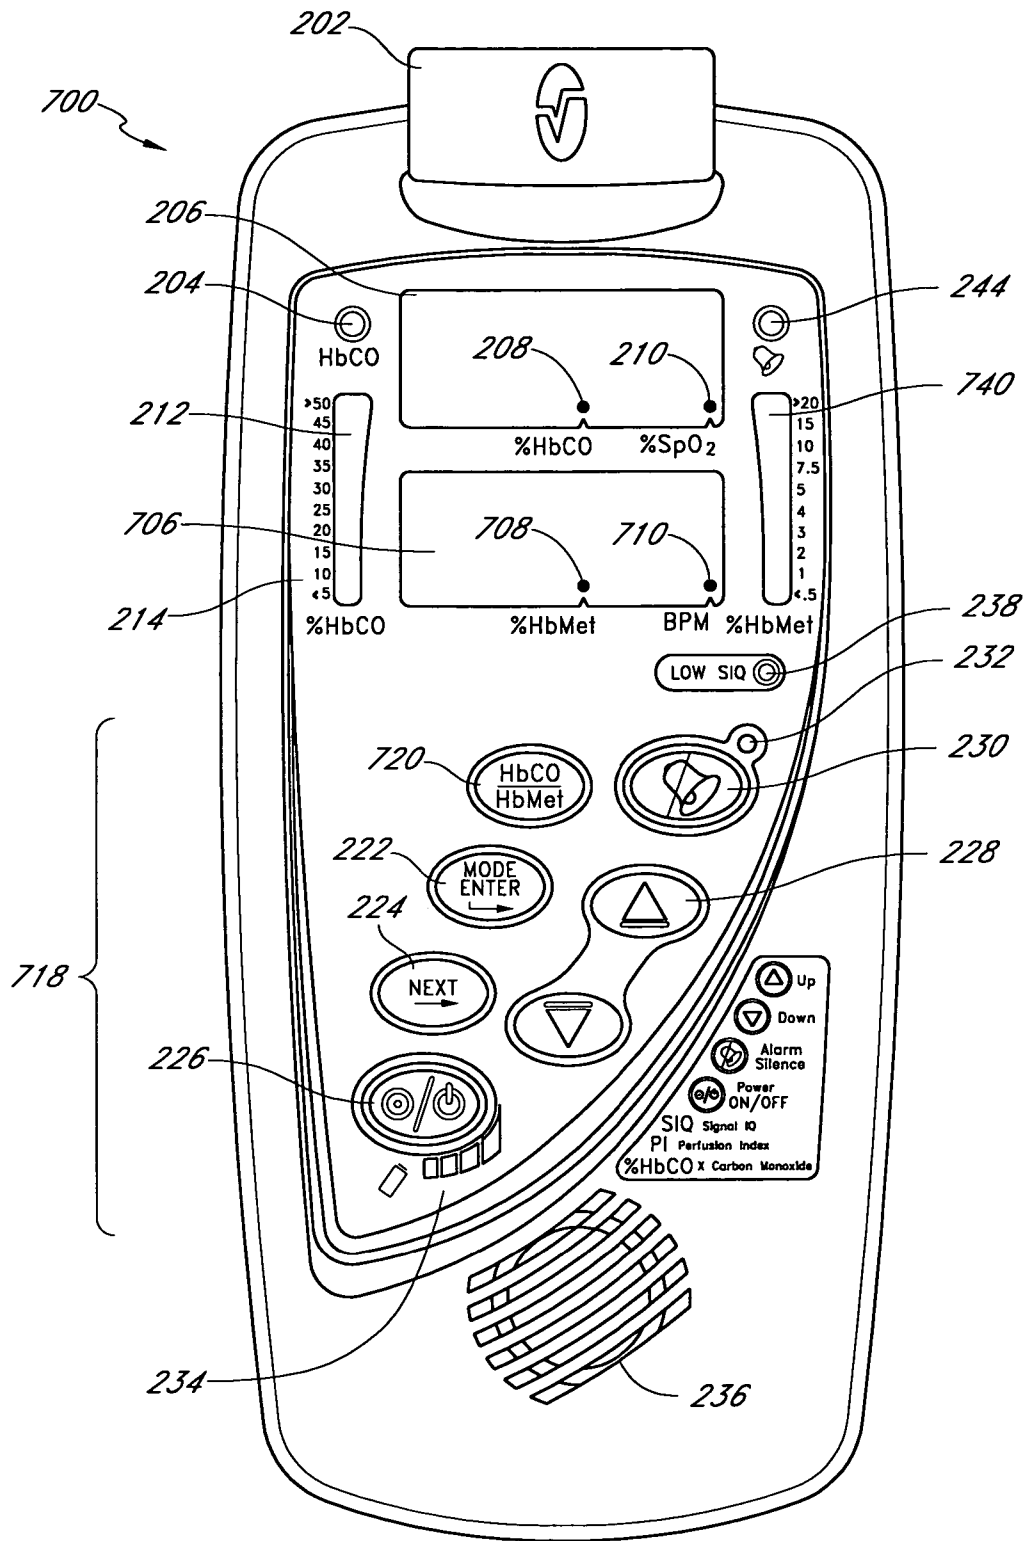


FIG. 7

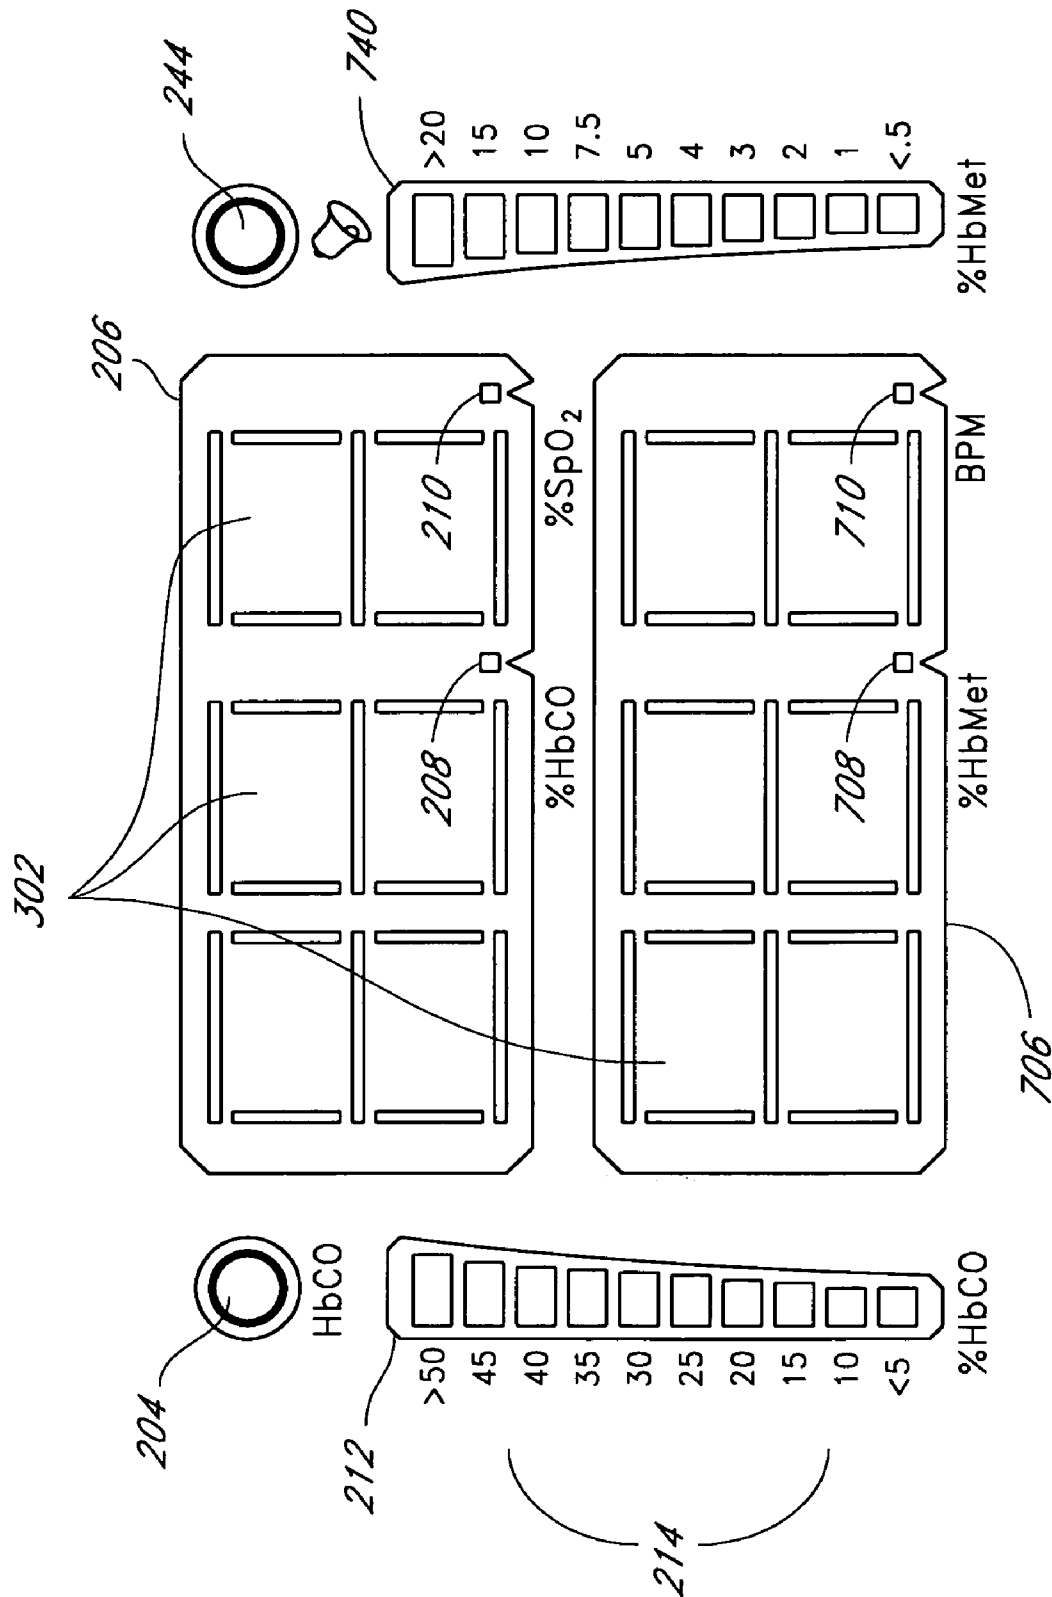


FIG. 8

U.S. Patent

May 29, 2012

Sheet 9 of 18

US 8,190,223 B2

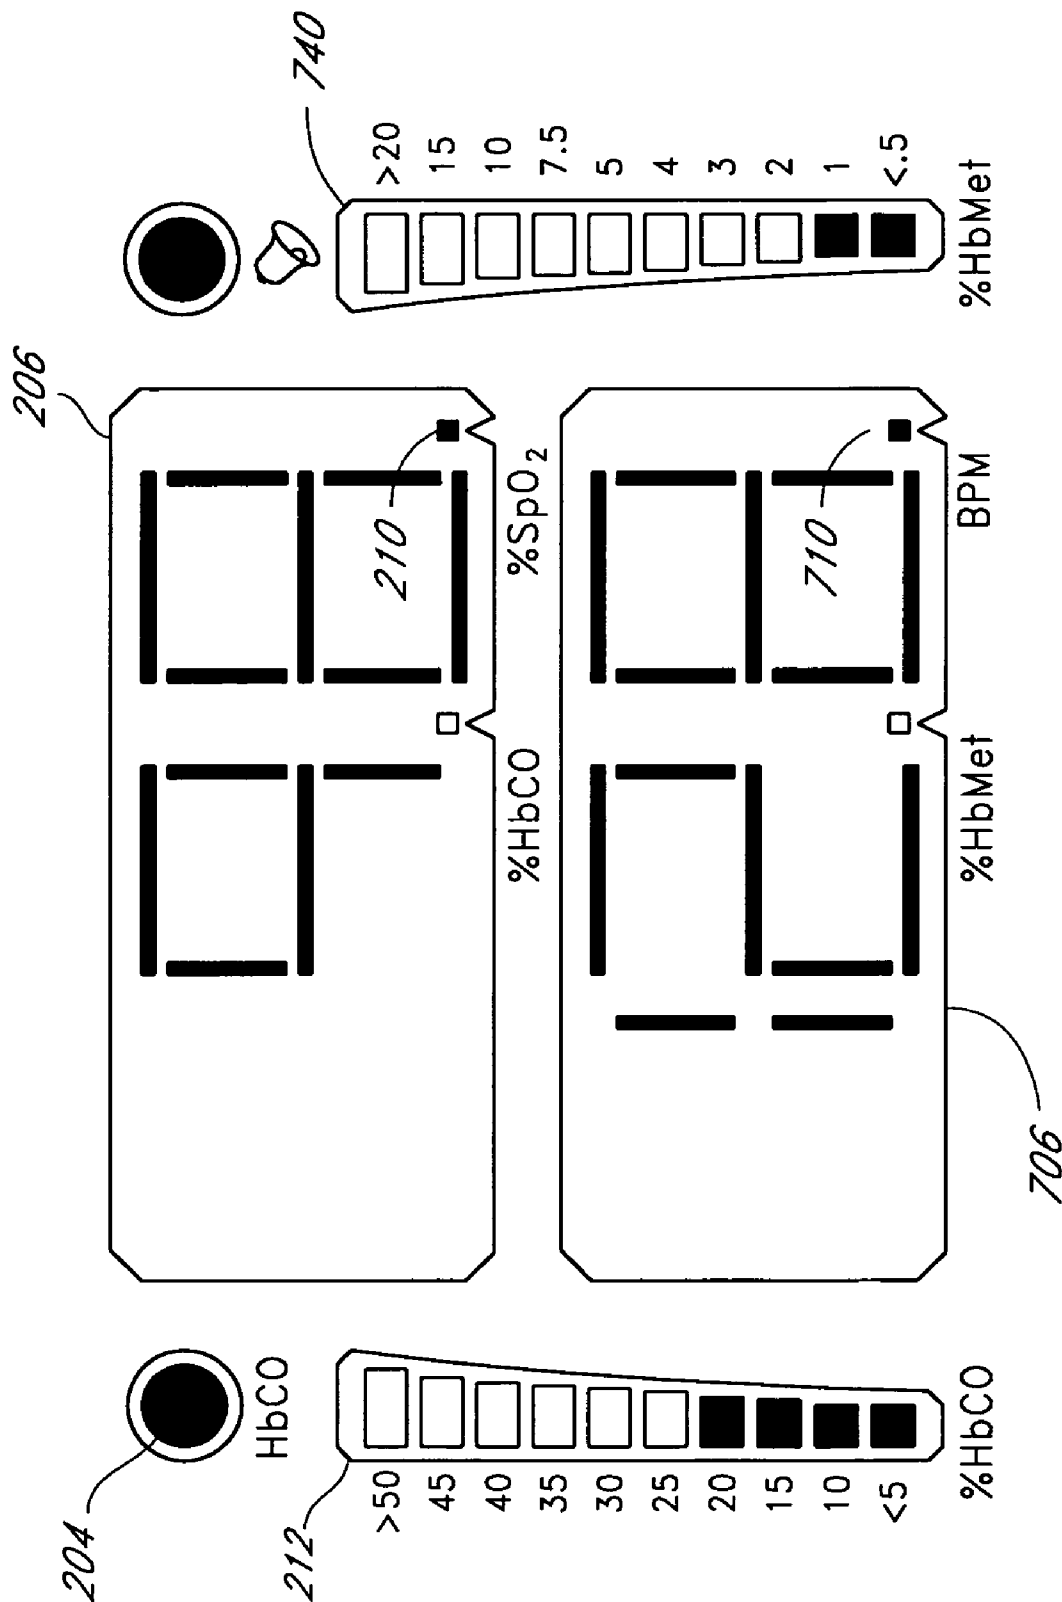


FIG. 9

U.S. Patent

May 29, 2012

Sheet 10 of 18

US 8,190,223 B2

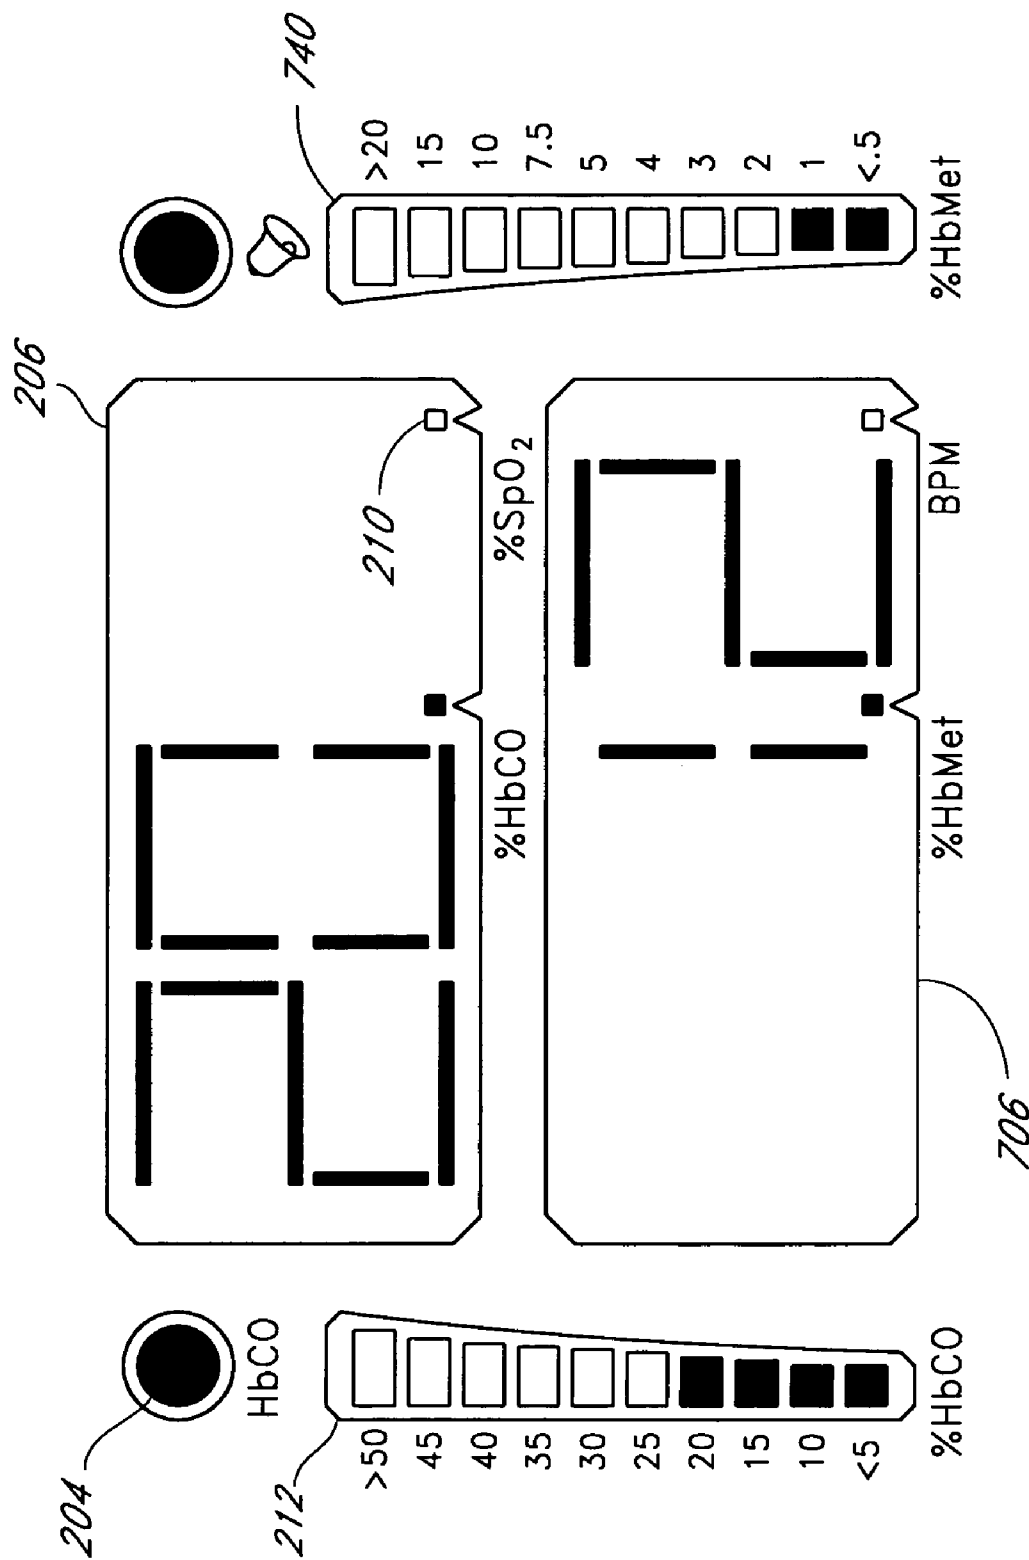


FIG. 10

U.S. Patent

May 29, 2012

Sheet 11 of 18

US 8,190,223 B2

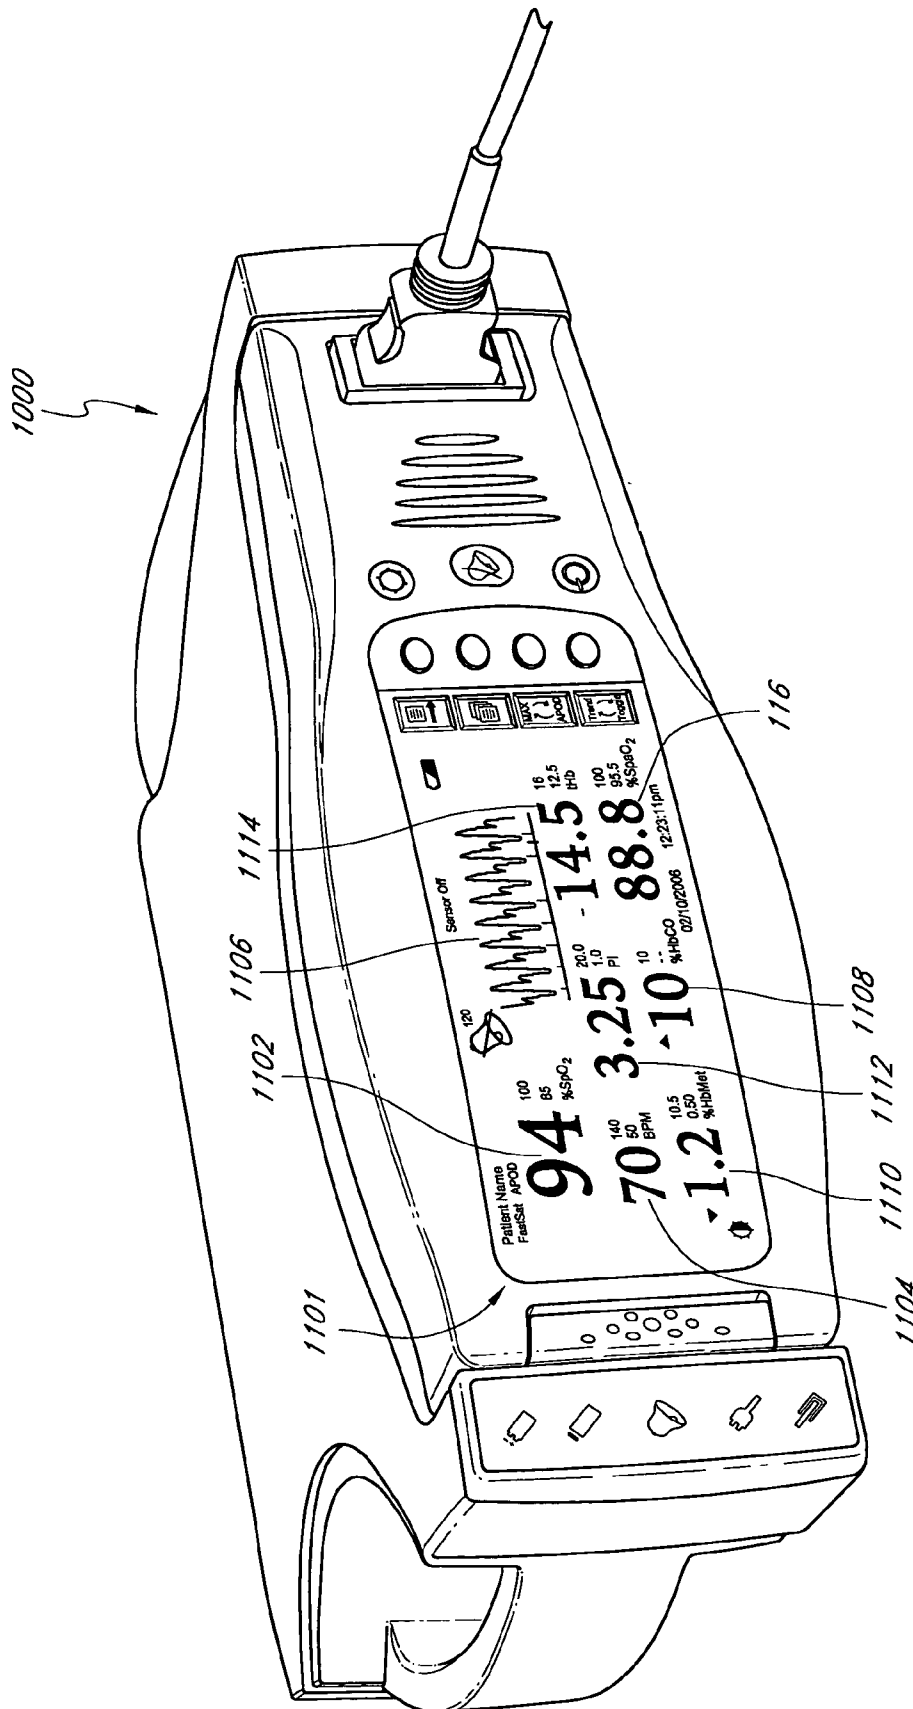


FIG. 11A

U.S. Patent

May 29, 2012

Sheet 12 of 18

US 8,190,223 B2

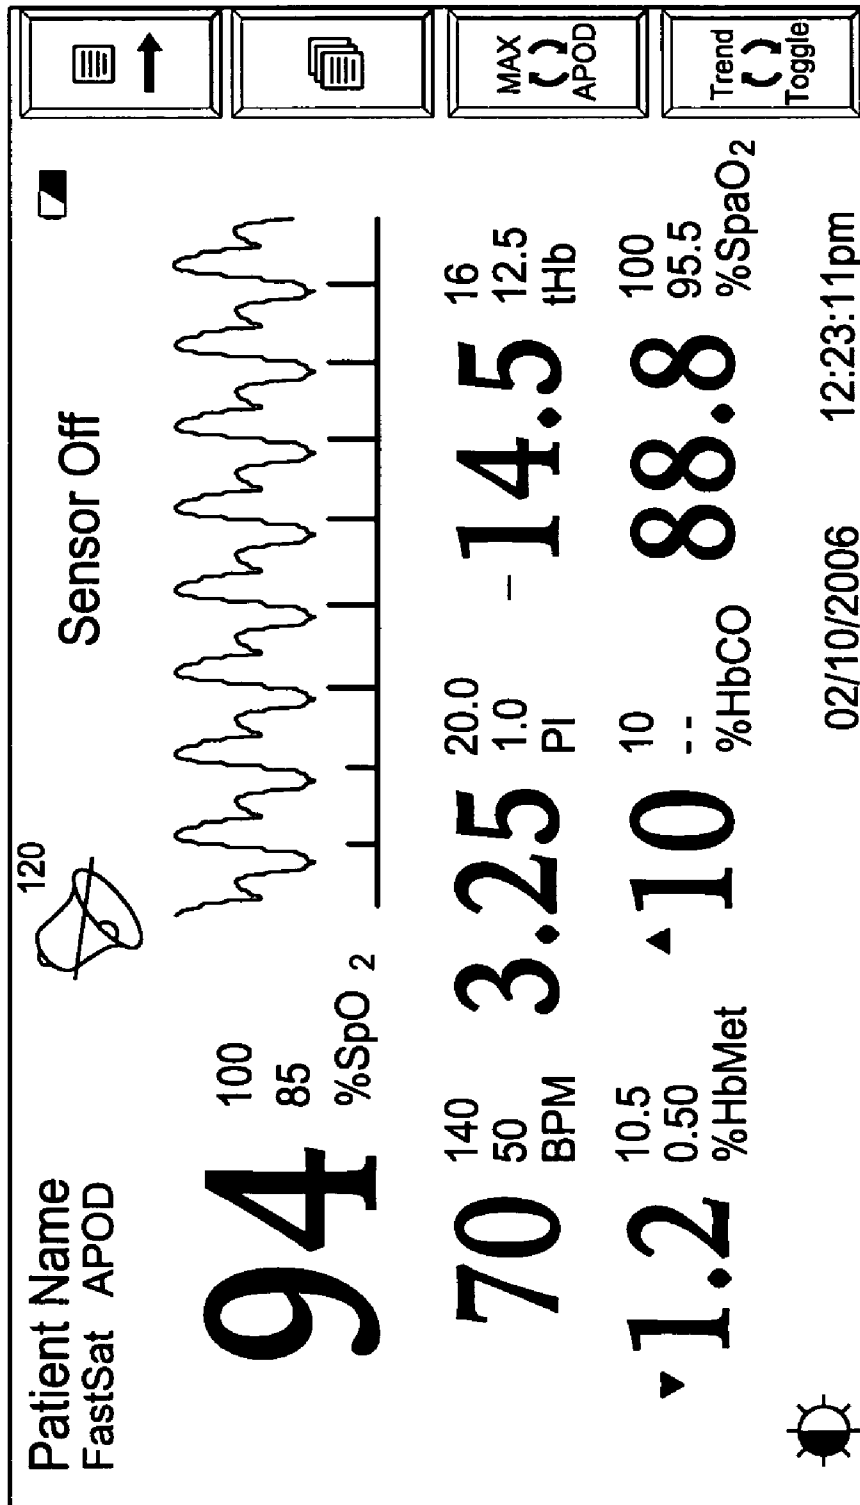


FIG. 11B

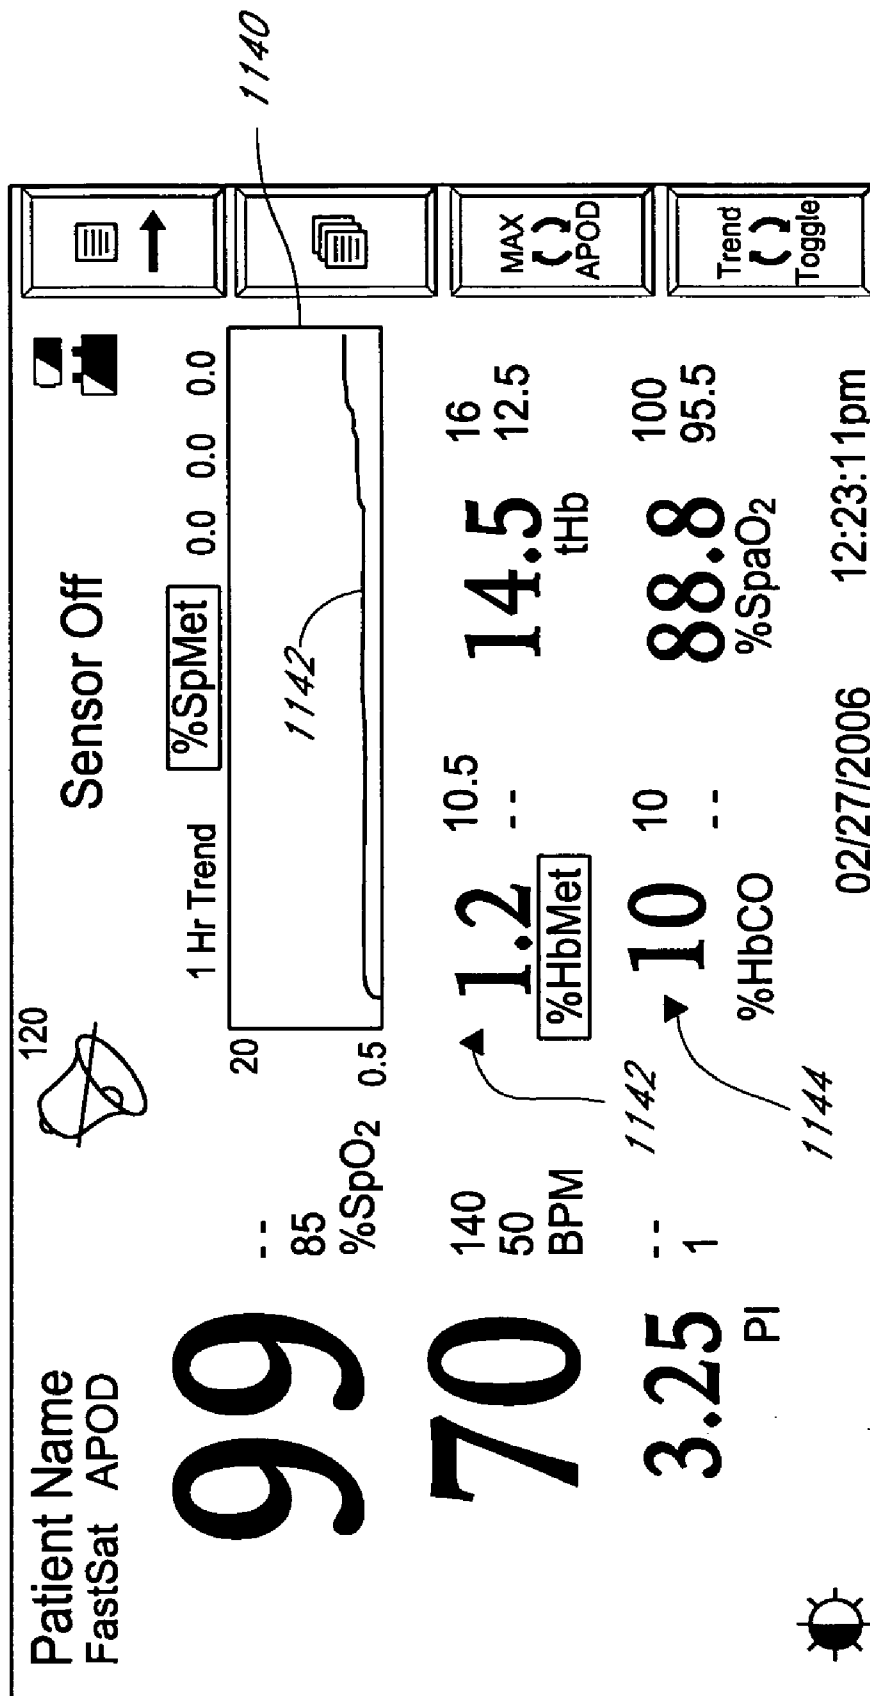


FIG. 11C

U.S. Patent

May 29, 2012

Sheet 14 of 18

US 8,190,223 B2

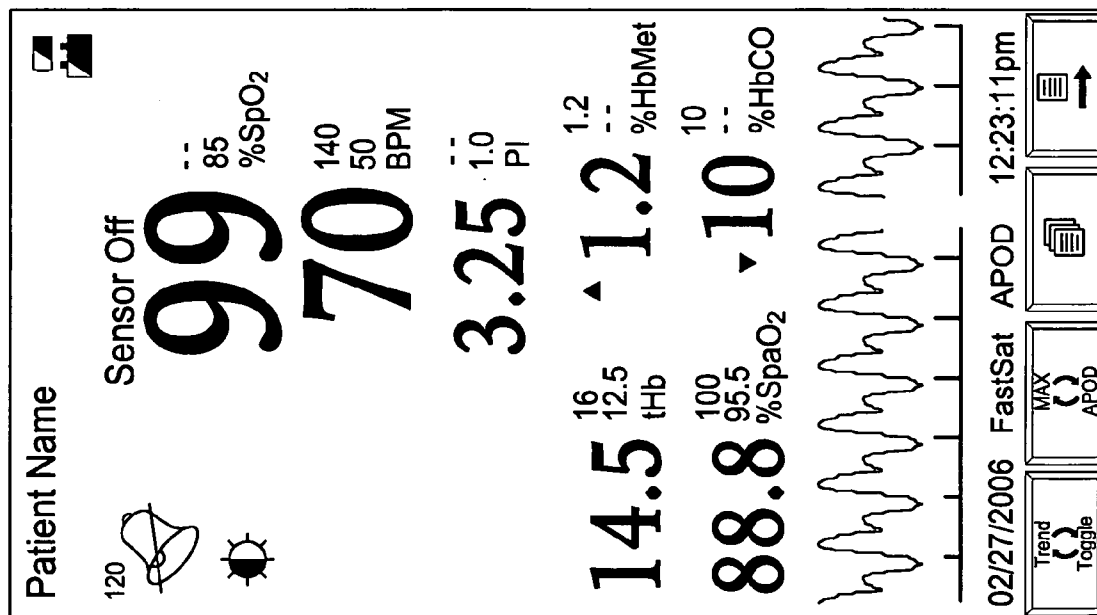


FIG. 11D

U.S. Patent

May 29, 2012

Sheet 15 of 18

US 8,190,223 B2

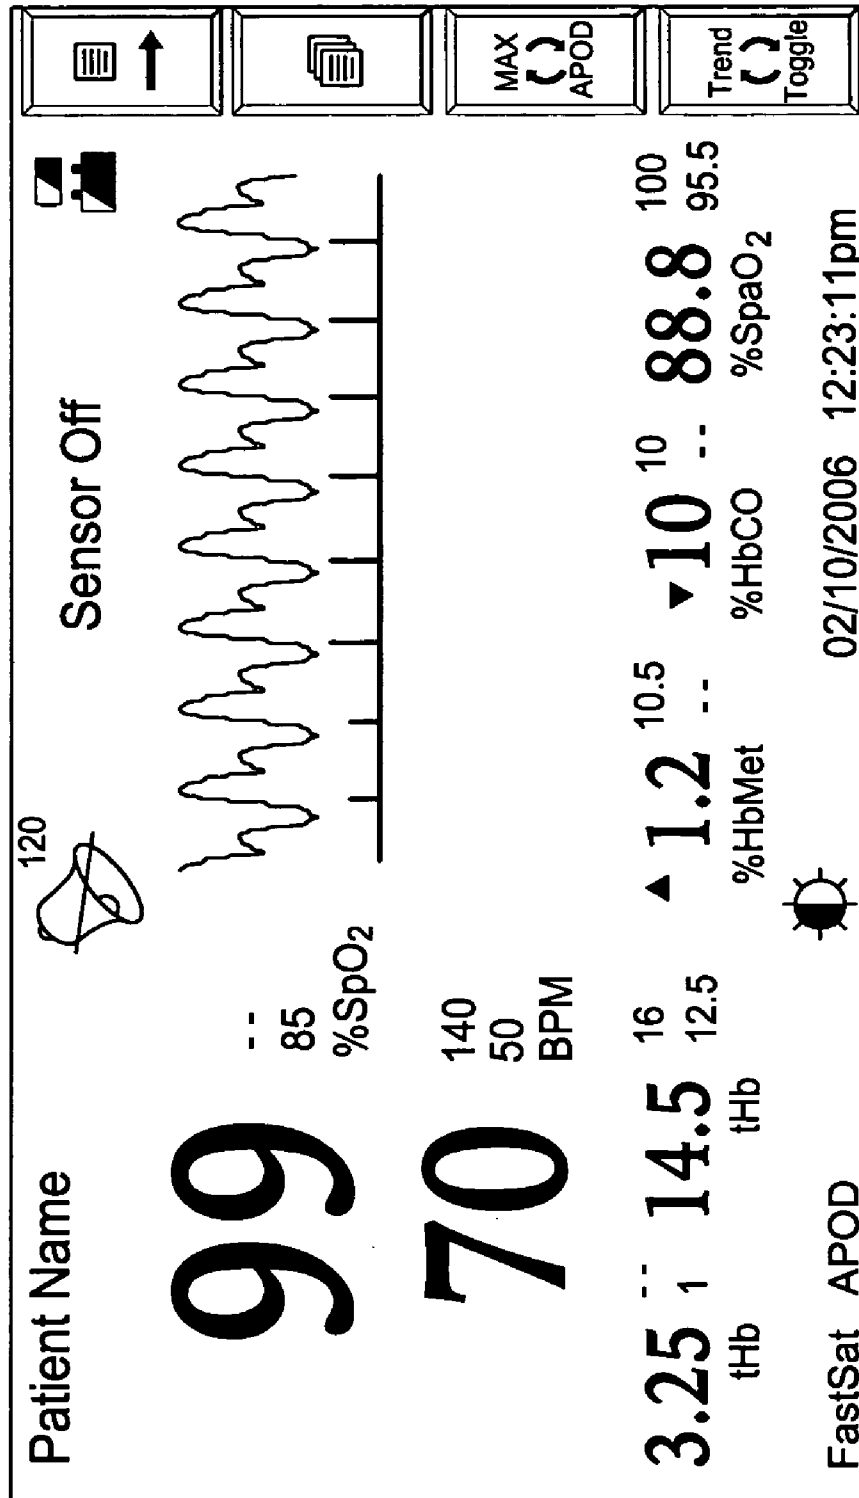


FIG. 11E

U.S. Patent

May 29, 2012

Sheet 16 of 18

US 8,190,223 B2

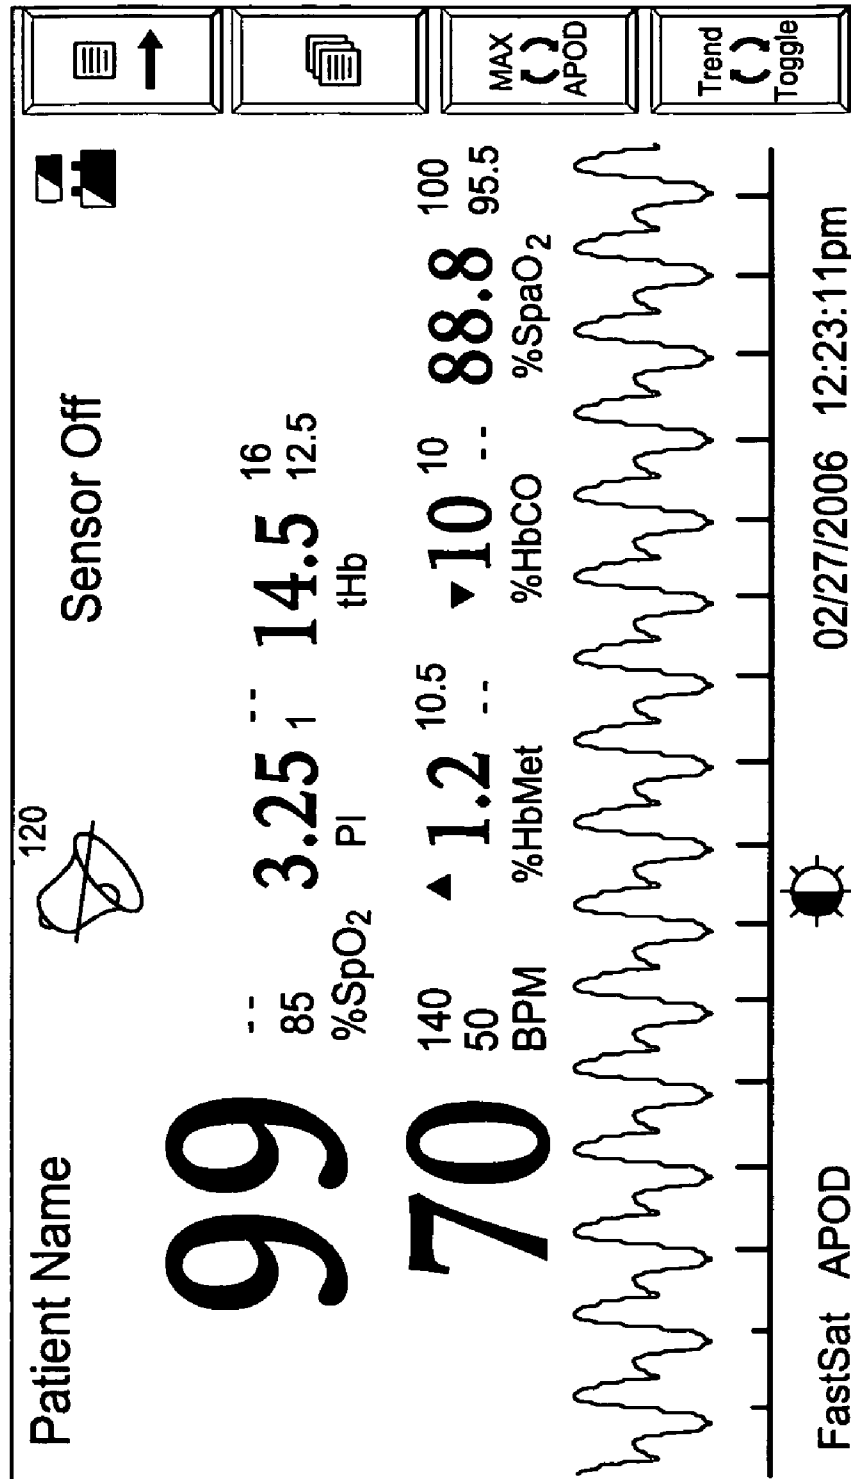


FIG. 11F

U.S. Patent

May 29, 2012

Sheet 17 of 18

US 8,190,223 B2

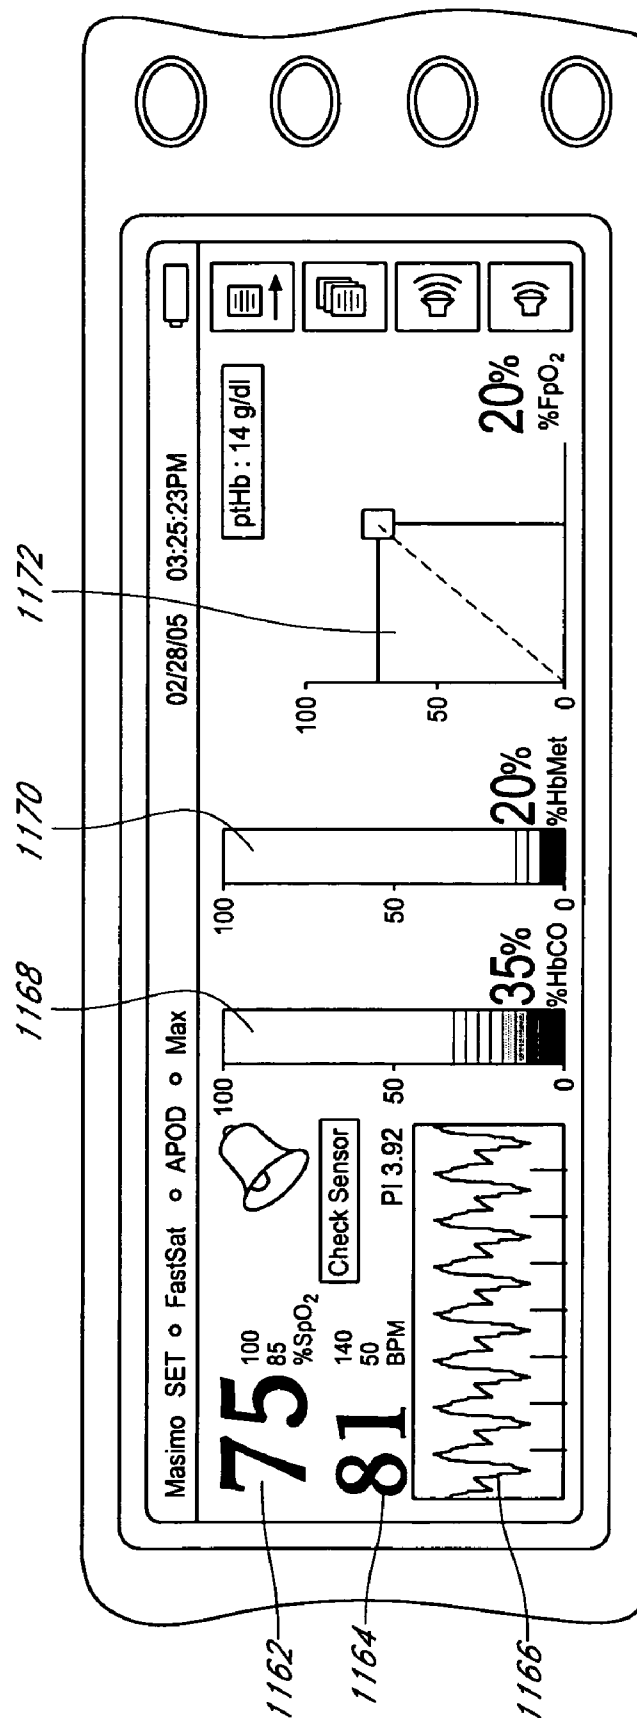


FIG. 11G

U.S. Patent

May 29, 2012

Sheet 18 of 18

US 8,190,223 B2

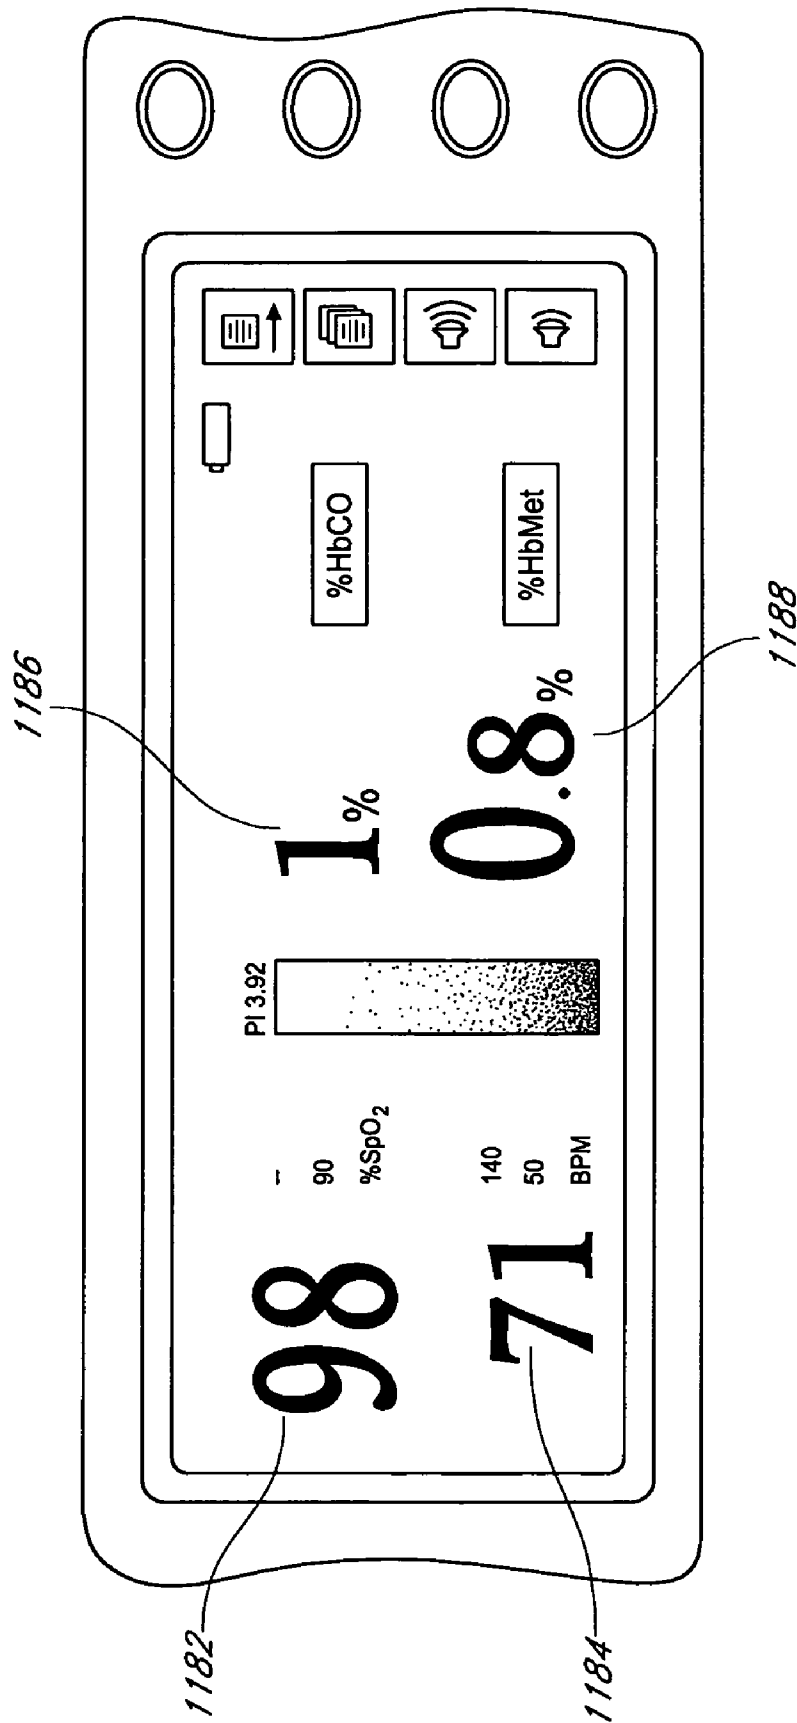


FIG. 11H

US 8,190,223 B2

1

**NONINVASIVE MULTI-PARAMETER
PATIENT MONITOR**

**PRIORITY CLAIM TO RELATED PROVISIONAL
APPLICATIONS**

The present application claims priority benefit under 35 U.S.C. §119(e) to U.S. Provisional Patent Application Ser. No. 60/657,596, filed Mar. 1, 2005, entitled “Multiple Wavelength Sensor,” No. 60/657,281, filed Mar. 1, 2005, entitled “Physiological Parameter Confidence Measure,” No. 60/657,268, filed Mar. 1, 2005, entitled “Configurable Physiological Measurement System,” and No. 60/657,759, filed Mar. 1, 2005, entitled “Noninvasive Multi-Parameter Patient Monitor.” The present application incorporates the foregoing disclosures herein by reference.

**INCORPORATION BY REFERENCE OF
RELATED UTILITY APPLICATIONS**

The present application is related to the following copending U.S. utility applications:

	App. Sr. No.	Filing Date	Title	Atty Dock.
1	11/367,013	Mar. 1, 2006	Multiple Wavelength Sensor Emitters	MLR.002A
2	11/366,995	Mar. 1, 2006	Multiple Wavelength Sensor Equalization	MLR.003A
3	11/366,209	Mar. 1, 2006	Multiple Wavelength Sensor Substrate	MLR.004A
4	11/366,210	Mar. 1, 2006	Multiple Wavelength Sensor Interconnect	MLR.005A
5	11/366,833	Mar. 1, 2006	Multiple Wavelength Sensor Attachment	MLR.006A
6	11/366,997	Mar. 1, 2006	Multiple Wavelength Sensor Drivers	MLR.009A
7	11/367,034	Mar. 1, 2006	Physiological Parameter Confidence Measure	MLR.010A
8	11/367,036	Mar. 1, 2006	Configurable Physiological Measurement System	MLR.011A
9	11/367,014	Mar. 1, 2006	Noninvasive Multi-Parameter Patient Monitor	MLR.013A
10	11/366,208	Mar. 1, 2006	Noninvasive Multi-Parameter Patient Monitor	MLR.014A

The present application incorporates the foregoing disclosures herein by reference.

FIELD OF THE DISCLOSURE

The present disclosure relates to the field of noninvasive patient monitors. More specifically, the disclosure relates to monitors displaying measurements derived using signals from optical sensors.

BACKGROUND

Spectroscopy is a common technique for measuring the concentration of organic and some inorganic constituents of a solution. The theoretical basis of this technique is the Beer-Lambert law, which states that the concentration c_i of an absorbent in solution can be determined by the intensity of light transmitted through the solution, knowing the path-length d_λ , the intensity of the incident light $I_{0,\lambda}$, and the

2

extinction coefficient $\epsilon_{i,\lambda}$ at a particular wavelength λ . In generalized form, the Beer-Lambert law is expressed as:

$$I_\lambda = I_{0,\lambda} e^{-d_\lambda \mu_{0,\lambda}} \quad (1)$$

$$\mu_{0,\lambda} = \sum_{i=1}^n \epsilon_{i,\lambda} \cdot c_i \quad (2)$$

where $\mu_{0,\lambda}$ is the bulk absorption coefficient and represents the probability of absorption per unit length. The minimum number of discrete wavelengths that are required to solve Equations 1-2 are the number of significant absorbers that are present in the solution.

A practical application of this technique is pulse oximetry, which utilizes a noninvasive sensor to measure oxygen saturation (SpO_2) and pulse rate. In general, the sensor has light emitting diodes (LEDs) that transmit optical radiation of red and infrared wavelengths into a tissue site and a detector that responds to the intensity of the optical radiation after absorption (e.g., by transmission or transreflectance) by pulsatile arterial blood flowing within the tissue site. Based on this response, a processor determines measurements for SpO_2 , pulse rate, and can output representative plethysmographic waveforms. Thus, “pulse oximetry” as used herein encompasses its broad ordinary meaning known to one of skill in the art, which includes at least those noninvasive procedures for measuring parameters of circulating blood through spectroscopy. Moreover, “plethysmograph” as used herein (commonly referred to as “photoplethysmograph”), encompasses its broad ordinary meaning known to one of skill in the art, which includes at least data representative of a change in the absorption of particular wavelengths of light as a function of the changes in body tissue resulting from pulsing blood.

Pulse oximeters capable of reading through motion induced noise are available from Masimo Corporation (“Masimo”) of Irvine, Calif. Moreover, portable and other oximeters capable of reading through motion induced noise are disclosed in at least U.S. Pat. Nos. 6,770,028, 6,658,276, 6,157,850, 6,002,952, and 5,769,785. Read which are owned by Masimo, and are incorporated by reference herein. Such reading through motion oximeters have gained rapid acceptance in a wide variety of medical applications, including surgical wards, intensive care and neonatal units, general wards, home care, physical training, and virtually all types of monitoring scenarios.

SUMMARY OF THE DISCLOSURE

Despite the success of read through motion oximeter systems, there is a need to provide patient monitors capable of displaying multiple physiological parameters, other than or in addition to SpO_2 , plethysmograph waveforms, or pulse rates. For example, in accessing a patient’s condition, caregivers often desire knowledge of other blood constituents, including for example, a percent value for arterial carbon monoxide saturation (“HbCO”) or a percent value for methemoglobin saturation (“HbMet”) or the like. For example, in an embodiment, the display advantageously displays one or more of the following: pulse rate, plethysmograph waveform data, perfusion index, values of blood constituents in body tissue, including for example, HbCO, HbMet, total hemoglobin (“Hbt”), arterial oxygen saturation (“ SpO_2 ”), fractional arterial oxygen saturation (“ SpaO_2 ”), or the like. In other embodiments, the monitor may advantageously and accurately determine values for one or more of HbO_2 , Hb, blood glucose,

US 8,190,223 B2

3

water, the presence or absence of therapeutic drugs (aspirin, Dapson, nitrates, or the like) or abusive/recreational drugs (methamphetamine, alcohol, steroids, or the like), concentrations of carbon dioxide (“CO₂”) or oxygen (“O₂”), pH levels, bilirubin, perfusion quality, signal quality or the like. Accordingly, the present disclosure includes a multi-parameter patient monitor capable of determining one or more of the foregoing parameters, other than or in addition to, SpO₂, plethysmograph waveforms, or perfusion quality index.

In an embodiment, the display of a noninvasive multi-parameter patient monitor advantageously includes a plurality of display modes enabling more parameter data to be displayed than the available physical display area or real estate. In an embodiment, a user may cycle different parameter values through an area of the display common to both parameters even when one parameter is shifted, through, for example, actuation of a user input key. The patient monitor may also display different parameters as color-coded. For example, when the following measured parameters are within “normal” ranges, SpO₂ may be displayed red, pulse rate (BPM) may be displayed green, HbCO may be displayed orange, HbMet may be displayed blue, or the like. In an embodiment, measured values of SpO₂ may be displayed in white, BPM may be displayed in yellow green or aquamarine, P_{ITM} may be displayed in violet, Hbt may be displayed in grass green, HbMet may be displayed in blue or light blue, HbCO may be displayed in orange, and SpaO₂ may be displayed in electric blue.

Moreover, parameter trend data may also be displayed using the same or similar color coding, especially when multiple trends are displayed on one or more display graphs. In addition, more coarse or gross parameter indications may be displayed for quick reference to indicate to a caregiver whether any of a variety of monitored parameters, such as, for example, SpO₂, HbCO or HbMet is within acceptable ranges. The monitor may advantageously include additional display information, such as, for example, parametric displays where one parameter is displayed as a function of another, three dimensional displays (for example, extending a parametric display along time or an additional parameter), directional indicators predicting where a parameter is likely heading or reporting a general direction a parameters has been trending, or the like.

In addition to the foregoing, caregivers often desire to more closely monitor parameters that are close to, approaching, or beyond normal safe thresholds. In an embodiment, the patient monitor provides an indication that the caregiver should change display modes to view more critical monitored parameters. In alternative embodiments, the patient monitor automatically changes display modes to show parameters moving closer to or beyond normal thresholds.

In an embodiment, the patient monitor includes an audible or visual indication of a type of sensor communicating with the monitor. For example, the monitor may determine how many wavelengths a particular attached sensor will emit through communication with memory devices associated with the attached sensor or cable.

Additional embodiments include audio or visual alarms for each of multiple monitored parameters, combinations of parameters, an indication of perfusion in the tissue of the measurement site, an indication of the confidence the signal processing has in its output measurements, or the like.

For purposes of summarization, certain aspects, advantages and novel features are described herein. Of course, it is to be understood that not necessarily all such aspects, advantages or features need to be present in any particular embodiment.

4

BRIEF DESCRIPTION OF THE DRAWINGS

The drawings and the associated descriptions are provided to illustrate embodiments of the disclosure and not to limit the scope of the claims.

FIG. 1 illustrates a block diagram of an exemplary embodiment of a patient monitoring system including a sensor and a multi-parameter patient monitor.

FIG. 2 illustrates a top elevation view of an exemplary handheld noninvasive multi-parameter patient monitor capable of displaying at least HbCO, such as, for example, the patient monitor of FIG. 1.

FIG. 3 illustrates an exemplary display of the patient monitor of FIG. 2.

FIG. 4 illustrates the display of FIG. 3 showing measured values of SpO₂, BPM, perfusion, and type of sensor according to an exemplary embodiment of the patient monitor of FIG. 1.

FIG. 5 illustrates the display of FIG. 3 showing measured values of HbCO, perfusion, and type of sensor according to an exemplary embodiment of the patient monitor of FIG. 1.

FIG. 6 illustrates the display of FIG. 3 showing measured values of SpO₂, HbCO, BPM, perfusion, and type of sensor, according to an exemplary embodiment of the patient monitor of FIG. 1.

FIG. 7 illustrates a top elevation view of an exemplary handheld noninvasive multi-parameter patient monitor capable of displaying at least HbCO and HbMet, such as, for example, the patient monitor of FIG. 1.

FIG. 8 illustrates an exemplary display of the patient monitor of FIG. 7.

FIG. 9 illustrates the display of FIG. 8 showing measured values of SpO₂, BPM, HbCO, HbMet, and type of sensor according to an exemplary embodiment of the patient monitor of FIG. 1.

FIG. 10 illustrates the display of FIG. 8 showing measured values of HbCO, HbMet, and type of sensor according to an exemplary embodiment of the patient monitor of FIG. 1.

FIG. 11A illustrates a perspective view of an exemplary noninvasive multi-parameter patient monitor such as, for example, the patient monitor of FIG. 1.

FIGS. 11B-11H illustrate display screens of the patient monitor of FIG. 11A.

DETAILED DESCRIPTION OF PREFERRED AND ALTERNATIVE EMBODIMENTS

Embodiments of the present disclosure include a portable or other multi-parameter patient monitor capable of determining multiple physiological parameters from one or more signals output from one or more light sensitive detectors capable of detecting light attenuated by body tissue carrying pulsing blood. For example, in an embodiment, the monitor advantageously and accurately determines a wide variety of physiological parameters or other calculations as discussed above.

In an embodiment, the display of patient monitor advantageously includes a plurality of display modes enabling more parameter data to be displayed than the available physical display real estate. For example, the patient monitor may include one or more user input keys capable of toggling through measurement data. In an embodiment, the displays include mode indicators providing caregivers easily identifiable visual queues, such as LED's, text, icons, or other indicia providing readily identifiable queues as to which parameter is being displayed. In an embodiment, the display may shift, may be parameter color-coded, or the like to further ensure

US 8,190,223 B2

5

quick comprehension of which measured parameter is the displayed parameter. For example, in an embodiment, the monitor displays SpO₂ in white, pulse rate (BPM) in green, HbCO in orange, and HbMet in blue when the respective measured parameter is within a “normal” range.

In an embodiment, the patient monitor provides an indication that the caregiver should change display modes to view more critical or time sensitive measured parameters, specific caregiver selected parameters, or the like. For example, the patient monitor may advantageously sound audio or visual alarms that alert the caregiver to particular one or more of worsening parameters, parameters changing in a predetermined pattern or rate, parameters stabilizing below user defined or safe thresholds, caregiver selected parameters, or the like. The monitor may also use alerts that provide audio or visual indications of the severity of the condition, severity of the change, or the like. In alternative embodiments, the patient monitor may automatically change display modes when a particular parameter crosses one or more thresholds. For example, a patient monitor may be displaying a first parameter, such as a plethysmograph, and upon determining measurements indicating that HbMet is trending toward an alarm condition, the monitor may automatically switch from displaying the first parameter to the alarming parameter, or in this case, a trend of the alarming parameter.

In an embodiment, a switch is provided to allow a user to switch displays to view an alarming measurement. In an embodiment, during an alarm condition, a parameter display may switch to a trend graph in the same or different color, line weight, flash, flash rate, intensity, size, or the like.

The patient monitor may also include one or more displays capable of displaying trend data for any one or more of the monitored or derived patient parameters. For example, the trend data may be displayed in graph form, may include multiple trend lines, each representing a different monitored or derived patient parameter. Moreover, each trend line may be color-coded to facilitate quick comprehension of which trend line represents which measured parameter. However, an artisan will recognize from the disclosure herein a large number of identification techniques including color-coding, identifying text, or the like. Additionally, user input may toggle displayed trend data, may select which parameters to display simultaneously, or the like.

In an embodiment, the patient monitor includes an audible or visual indication of a type of sensor communicating with the monitor. For example, the patient monitor may provide a particular audio or visual indication, such as a beep, LED activation, graphic activation, text messages, voice messages, or the like, to indicate communication with or connection to an approved sensor, patient cable, combination, or the like. In an embodiment, the indication may change based on the manufacturer, type of sensor recognized or not recognized, type of patient, type of physiological parameters measurable with the attached sensor, or the like. Additional embodiments include an indication of perfusion in the tissue of the measurement site and an indication of the confidence the signal processing has in its output measurements or input signal quality.

To facilitate an understanding of the disclosure, the remainder of the description references exemplary embodiments illustrated in the drawings. Moreover, in this application, reference is made to many blood parameters. Some references that have common shorthand designations are referenced through such shorthand designations. For example, as used herein, HbCO designates carboxyhemoglobin, HbMet designates methemoglobin, and Hbt designates total hemoglobin. Other shorthand designations such as COHb,

6

MetHb, and tHb are also common in the art for these same constituents. These constituents are generally reported herein in terms of a percentage, often referred to as saturation, relative concentration or fractional saturation. Total hemoglobin is generally reported as a concentration in g/dL. The use of the particular shorthand designators presented in this application does not restrict the term to any particular manner in which the designated constituent is reported.

FIG. 1 illustrates a block diagram of an exemplary embodiment of a patient monitoring system 100. As shown in FIG. 1, the system 100 includes a patient monitor 102 comprising a processing board 104 and a host instrument 108. The processing board 104 communicates with a sensor 106 to receive one or more intensity signal(s) indicative of one or more parameters of tissue of a patient. The processing board 104 also communicates with a host instrument 108 to display determined values calculated using the one or more intensity signals. According to an embodiment, the board 104 comprises processing circuitry arranged on one or more printed circuit boards capable of installation into the monitor 102, or capable of being distributed as some or all of one or more OEM components for a wide variety of host instruments monitoring a wide variety of patient information. In an embodiment, the processing board 102 comprises a sensor interface 110, a digital signal processor and signal extractor (“DSP” or “processor”) 112, and an instrument manager 114. In general, the sensor interface 110 converts digital control signals into analog drive signals capable of driving sensor emitters, and converts composite analog intensity signal(s) from light sensitive detectors into digital data.

In an embodiment, the sensor interface 110 manages communication with external computing devices. For example, in an embodiment, a multipurpose sensor port (or input/output port) is capable of connecting to the sensor 106 or alternatively connecting to a computing device, such as a personal computer, a PDA, additional monitoring equipment or networks, or the like. When connected to the computing device, the processing board 104 may upload various stored data for, for example, off-line analysis and diagnosis. The stored data may comprise trend data for any one or more of the measured parameter data, plethysmograph waveform data acoustic sound waveform, or the like. Moreover, the processing board 104 may advantageously download from the computing device various upgrades or executable programs, may perform diagnosis on the hardware or software of the monitor 102. In addition, the processing board 104 may advantageously be used to view and examine patient data, including raw data, at or away from a monitoring site, through data uploads/downloads, or network connections, combinations, or the like, such as for customer support purposes including software maintenance, customer technical support, and the like. Upgradable sensor ports are disclosed in copending U.S. application Ser. No. 10/898,680, filed on Jul. 23, 2004, titled “Multipurpose Sensor Port,” incorporated by reference herein.

As shown in FIG. 1, the digital data is output to the DSP 112. According to an embodiment, the DSP 112 comprises a processing device based on the Super Harvard ARChitecture (“SHARC”), such as those commercially available from Analog Devices. However, a skilled artisan will recognize from the disclosure herein that the DSP 112 can comprise a wide variety of data and/or signal processors capable of executing programs for determining physiological parameters from input data. In particular, the DSP 112 includes program instructions capable of receiving multiple channels of data related to one or more intensity signals representative of the absorption (from transmissive or reflective sensor systems) of

US 8,190,223 B2

7

a plurality of wavelengths of emitted light by body tissue. In an embodiment, the DSP **112** accepts data related to the absorption of eight (8) wavelengths of light, although an artisan will recognize from the disclosure herein that the data can be related to the absorption of two (2) to sixteen (16) or more wavelengths.

FIG. **1** also shows the processing board **104** including the instrument manager **114**. According to an embodiment, the instrument manager **114** may comprise one or more micro-controllers controlling system management, including, for example, communications of calculated parameter data and the like to the host instrument **108**. The instrument manager **114** may also act as a watchdog circuit by, for example, monitoring the activity of the DSP **112** and resetting it when appropriate.

The sensor **106** may comprise a reusable clip-type sensor, a disposable adhesive-type sensor, a combination sensor having reusable and disposable components, or the like. Moreover, an artisan will recognize from the disclosure herein that the sensor **106** can also comprise mechanical structures, adhesive or other tape structures, Velcro wraps or combination structures specialized for the type of patient, type of monitoring, type of monitor, or the like. In an embodiment, the sensor **106** provides data to the board **104** and vice versa through, for example, a patient cable. An artisan will also recognize from the disclosure herein that such communication can be wireless, over public or private networks or computing systems or devices, or the like.

As shown in FIG. **1**, the sensor **106** includes a plurality of emitters **116** irradiating the body tissue **118** with differing wavelengths of light, and one or more detectors **120** capable of detecting the light after attenuation by the tissue **118**. In an embodiment, the emitters **116** comprise a matrix of eight (8) emission devices mounted on a flexible substrate, the emission devices being capable of emitting eight (8) differing wavelengths of light. In other embodiments, the emitters **116** may comprise twelve (12) or sixteen (16) emitters, although other numbers of emitters are contemplated, including two (2) or more emitters. As shown in FIG. **1**, the sensor **106** may include other electrical components such as, for example, a memory device **122** comprising an EPROM, EEPROM, ROM, RAM, microcontroller, combinations of the same, or the like. In an embodiment, other sensor components may include a temperature determination device **123** or other mechanisms for, for example, determining real-time emission wavelengths of the emitters **116**.

The memory **122** may advantageously store some or all of a wide variety data and information, including, for example, information on the type or operation of the sensor **106**; type or identification of sensor buyer or distributor or groups of buyer or distributors, sensor manufacturer information, sensor characteristics including the number of emitting devices, the number of emission wavelengths, data relating to emission centroids, data relating to a change in emission characteristics based on varying temperature, history of the sensor temperature, current, or voltage, emitter specifications, emitter drive requirements, demodulation data, calculation mode data, the parameters for which the sensor is capable of supplying sufficient measurement data (e.g., HpCO, HpMet, HbT, or the like), calibration or parameter coefficient data, software such as scripts, executable code, or the like, sensor electronic elements, whether the sensor is a disposable, reusable, multi-site, partially reusable, partially disposable sensor, whether it is an adhesive or non-adhesive sensor, whether the sensor is a reflectance, transmittance, or transreflectance sensor, whether the sensor is a finger, hand, foot, forehead, or ear sensor, whether the sensor is a stereo sensor or a two-headed

8

sensor, sensor life data indicating whether some or all sensor components have expired and should be replaced, encryption information, keys, indexes to keys or hash functions, or the like, monitor or algorithm upgrade instructions or data, some or all of parameter equations, information about the patient, age, sex, medications, and other information that may be useful for the accuracy or alarm settings and sensitivities, trend history, alarm history, or the like. In an embodiment, the monitor may advantageously store data on the memory device, including, for example, measured trending data for any number of parameters for any number of patients, or the like, sensor use or expiration calculations, sensor history, or the like.

FIG. **1** also shows the patient monitor **102** including the host instrument **108**. In an embodiment, the host instrument **108** communicates with the board **104** to receive signals indicative of the physiological parameter information calculated by the DSP **112**. The host instrument **108** preferably includes one or more display devices **124** capable of displaying indicia representative of the calculated physiological parameters of the tissue **118** at the measurement site. In an embodiment, the host instrument **108** may advantageously comprise a handheld housing capable of displaying one or more of a pulse rate, plethysmograph data, perfusion quality such as a perfusion quality index ("PITTM"), signal or measurement quality ("SQ"), values of blood constituents in body tissue, including for example, SpO₂, HbCO, HbMet, Hbt, or the like. In other embodiments, the host instrument **108** is capable of displaying values for one or more of Hbt, Hb, blood glucose, bilirubin, or the like. The host instrument **108** may be capable of storing or displaying historical or trending data related to one or more of the measured values, combinations of the measured values, plethysmograph data, or the like. The host instrument **108** also includes an audio indicator **126** and user input device **128**, such as, for example, a keypad, touch screen, pointing device, voice recognition device, or the like.

In still additional embodiments, the host instrument **108** includes audio or visual alarms that alert caregivers that one or more physiological parameters are falling below predetermined safe thresholds. The host instrument **108** may include indications of the confidence a caregiver should have in the displayed data. In a further embodiment, the host instrument **108** may advantageously include circuitry capable of determining the expiration or overuse of components of the sensor **106**, including, for example, reusable elements, disposable elements, or combinations of the same.

Although described in terms of certain embodiments, other embodiments or combination of embodiments will be apparent to those of ordinary skill in the art from the disclosure herein. For example, the monitor **102** may comprise one or more monitoring systems monitoring parameters, such as, for example, vital signs, blood pressure, ECG or EKG, respiration, glucose, bilirubin, or the like. Such systems may combine other information with intensity-derived information to influence diagnosis or device operation. Moreover, the monitor **102** may advantageously include an audio system, preferably comprising a high quality audio processor and high quality speakers to provide for voiced alarms, messaging, or the like. In an embodiment, the monitor **102** may advantageously include an audio out jack, conventional audio jacks, headphone jacks, or the like, such that any of the display information disclosed herein may be audibilized for a listener. For example, the monitor **102** may include an audible transducer input (such as a microphone, piezoelectric sensor, or the like) for collecting one or more of heart sounds, lung sounds, trachea sounds, or other body sounds and such

US 8,190,223 B2

9

sounds may be reproduced through the audio system and output from the monitor **102**. Also, wired or wireless communications (such as Bluetooth or WiFi, including IEEE 801.11a, b, or g), mobile communications, combinations of the same, or the like, may be used to transmit the audio output to other audio transducers separate from the monitor **102**.

For example, patterns or changes in the continuous noninvasive monitoring of intensity-derived information may cause the activation of other vital sign measurement devices, such as, for example, blood pressure cuffs.

FIG. 2 illustrates a perspective view of an exemplary handheld noninvasive multi-parameter patient monitor **200**, such as, for example, the patient monitor **102** of FIG. 2. Patient monitors **200** exhibiting combinations of many of the features described herein are advantageously commercially available from Masimo under the brand name "Rad 57c." As shown in FIG. 1, the monitor **200** includes a patient cable connector **202** capable of mechanical mating with a patient cable to establish communication between the board **104** and the sensor **106**. In an embodiment, the connector **202** comprises a multipurpose cable connector such as that disclosed in the incorporated U.S. application Ser. No. 10/898,680, titled "Multipurpose Sensor Port," disclosing communication between the board **104** and an external computing device.

The monitor **200** also comprises a HbCO indicator **204** advantageously providing a visual queue that a HbCO capable sensor is properly connected through the connector **202**. For example, the HbCO indicator **204** may advantageously activate when a sensor is connected that communicates sufficient information to determine HbCO, such as, for example, a sensor capable of emitting sufficient different wavelengths of light, a sensor storing sufficient data on the memory **122**, a sensor having appropriate encryption data or key, combinations of the same, or the like. For example, in an embodiment, the processor **112** may receive information from a memory **122** indicating a number of available LED wavelengths for the attached sensor. Based on the number of wavelengths, or other information stored on the memory **122**, the processor **112** may determine whether an HbCO-ready sensor has been attached to the monitor **200**. An artisan will also recognize from the disclosure herein that the HbCO indicator **204** may advantageously comprise a HbMet indicator, Hbt indicator, or the like, which activates to a predetermined color associated with a parameter, or any color, or deactivates the same, to convey a type of attached sensor. Moreover, the artisan will recognize from the disclosure herein other parameters that may use other sensor components and the monitor **200** may include indicators capable of indicating communication with those types of sensors.

In an embodiment, the monitor **200** may also audibly indicate the type of sensor connected. For example, the monitor **200** may emit predetermined number or frequency of beeps associated with recognition of a particular sensor, a particular manufacturer, failure to recognize the sensor, or the like. Moreover, the sensor type may be indicative of the componentry, such as, for example, whether the sensor produces sufficient data for the determination of HbCO, HbMet, Hbt and SpO₂, SpO₂ only, SpO₂ and HbMet, any combination of the foregoing or other parameters, or the like. Additionally, the sensor type may be indicative of specific sensors designed for a type of patient, type of patient tissue, or the like. In other embodiments, the monitor **200** may announce the type of connector through speaker **236**.

An artisan will also recognize from the disclosure herein that other mechanical (such as keys), electrical, or combination devices may inform the monitor **200** of the type of attached sensor. In an embodiment, the processor **112** also

10

may select to drive less emitters that are currently available, such as, for example, in the presence of low noise and when power consumption is an issue.

The monitor **200** also comprises a multi-mode display **206** capable of displaying, for example, measurements of SpO₂ and HbCO (or alternatively, HbMet). In an embodiment, the display **206** has insufficient space or display real estate to display the many parameters capable of being measured by the monitor **200**. Thus, the multi-mode display **206** may advantageously cycle through two or more measured parameters in an area common to both parameters even when shifted. In such embodiments, the monitor **200** may also advantageously include parameter indicators **208**, **210**, providing additional visual queues as to which parameter is currently displayed. In an embodiment, the display may also cycle colors, flash rates, or other audio or visual queues providing readily identifiable information as to which measured parameter is displayed. For example, when the multi-mode display **206** displays measured values of SpO₂ that are normal, the numbers may advantageously appear in green, while normal measured values of HbCO may advantageously appear in orange, and normal measured values of HbMet may appear in blue. Moreover, in an embodiment, the display **206** flashes at a predefined rate when searching for saturation and at another predefined rate when a signal quality is below a predetermined threshold.

The monitor **200** also comprises a HbCO bar **212** where in an embodiment a plurality of LED's activate from a bottom toward a top such that the bar "fills" to a level proportional to the measured value. For example, the bar **212** is lowest when the dangers from carbon monoxide poisoning are the least, and highest when the dangers are the greatest. The bar **212** includes indicia **214** that provide an indication of the severity of carbon monoxide saturation in a patient's blood. As shown in FIG. 2, the bar **212** and the indicia **214** continuously indicate the concentration of HbCO in about 5% increments. The indicia **214** indicate a measurement of HbCO saturation percentage between about 0 and about 50% with a granularity of about 5%. However, an artisan will also recognize from the disclosure herein a wide variety of ranges and granularities could be used, the indicia **214** could be electronically displayed in order to straightforwardly increase or decrease resolution, or the like. For example, HbCO may advantageously be displayed with greater resolution than \pm about %5 in a lower portion of the scale. For example, an HbCO bar may advantageously include a scale of about <3%, about 6%, about 9%, about 12%, about 15%, about 20%, about 25%, about 30%, about 35%, and about >40%.

As is known in the art, carbon monoxide in the blood can lead to serious medical issues. For example and depending upon the particular physiology of a patient, about 10% carbon monoxide saturation can lead to headaches, about 20% can lead to throbbing headaches, or dyspnea on exertion, about 30% can lead to impaired judgment, nausea, dizziness and/or vomiting, visual disturbance, or fatigue, about 40% can lead to confusion and syncope, and about 50% and above can lead to comas, seizures, respiratory failure and even death.

In an embodiment, the bar **212** is the same or similar color as the multi-mode display **206** when displaying HbCO. In other embodiments, the bar **212** is lowest and green when the dangers from carbon monoxide poisoning are the least, and highest and red when the dangers are the greatest. In an embodiment, as HbCO increases, the entire bar **212** may advantageously change color, such as, for example, from green to red, to provide a clear indication of deepening severity of the condition. In other embodiments, the bar **212** may advantageously blink or flash, an audio alarm may beep or

US 8,190,223 B2

11

provide a continuation or rise in pitch or volume, or the like to alert a caregiver of deepening severity. Moreover, straightforward to complex alarm rules may be implemented to reduce false alarms based on, for example, knowledge of the physiological limitations on the rate of change in HbCO or the like.

Additionally, the monitor **200** may be capable of storing and outputting historical parameter data, display trend traces or data, or the like. Although the foregoing bar **212** has been described in terms of certain preferred embodiments, other embodiments will be apparent to those of ordinary skill in the art from the disclosure herein.

FIG. **2** also shows the monitor **200** including a pulse display **216** displaying measured pulse rate in beats per minute ("BPM"). In an embodiment, the display **212** flashes when searching for a pulse. The pulse display **216** advantageously displays measured pulse rates from about zero (0) to about two hundred and forty (240) BPM. Moreover, when the measured pulse rates are considered normal, the pulse display **216** is advantageously green. Similar to other displays associated with the monitor **200**, the pulse display **216** may employ a variety of color changes, audio alarms, or combinations of the same to indicate measured BPM below predetermined safe thresholds. In an embodiment, the pulse rate display **216** displays the measured pulse rate during the display of SpO₂ and displays message data during the display of other parameters. For example, during the display of HbCO, the display **216** may advantageously display the term "CO." In an embodiment, the display of the message data may be in the same or similar color as the other displays. For example, in an embodiment, the multi-mode display **206**, the bar **212**, and the pulse display **216** may all display data or messages in orange when the multi-mode display **206** displays measured HbCO values.

FIG. **2** also illustrates the monitor **200** comprising user input keys **218**, including a HbCO button **220**, mode/enter button **222**, next button **224**, power on/off button **226**, up/down button **228**, and alarm silence button **230**. In an embodiment, activation of the HbCO button **220** toggles the measured value displayed in the multi-mode display **206**. For example, activation of the HbCO button **220** toggles the multi-mode display **206** from displaying measured values of SpO₂ to HbCO for about ten (10) seconds. Activation of the mode/enter button **222** or the next button **224** during the ten (10) second period returns the multi-mode display **206** back to SpO₂. A skilled artisan will also recognize that activation of the HbCO button **220** may advantageously toggle through a plurality of measured values, and that such values may be displayed for short segments and then return to SpO₂, may remain displayed until further activation of the button **220**, or the like.

Activation of the mode/enter button **222** cycles through various setup menus allowing a caregiver to select or activate certain entries within the menu setup system, including alarm threshold customizations, or the like. Activation of the next button **224** can move through setup options within the menu setup system and in an embodiment is not active during normal patient monitoring. For example, a caregiver may activate the mode/enter button **222** and the next button **224** to specify high and low alarm thresholds for one or more of the measured parameters, to specify device sensitivity, trend settings, display customizations, color code parameters, or the like. In an embodiment, the high alarm setting for SpO₂ can range from about two percent (2%) to about one hundred percent (100%) with a granularity of about one percent (1%). The low alarm setting for SpO₂ can range from about one percent (1%) to about one hundred percent (100%) with a granularity of about one percent (1%). Moreover, the high

12

alarm setting for pulse rate can range from about thirty (30) BPM to about two hundred and forty (240) BPM with a granularity of about five (5) BPM. The low alarm setting for pulse rate can range from about twenty five (25) BPM to about two hundred and thirty five (235) BPM with a granularity of about five (5) BPM. Other high and low ranges for other measured parameters will be apparent to one of ordinary skill in the art from the disclosure herein.

In a further embodiment, a caregiver may activate the mode/enter button **222** and the next button **224** to specify device sensitivity, such as, for example, device averaging times, probe off detection, whether to enable fast saturation calculations, or the like. Various embodiments of fast saturation calculations are disclosed in U.S. patent application Ser. No. 10/213,270, filed Aug. 5, 2002, titled "Variable Indication Estimator" and incorporated by reference herein. Using the menus, a caregiver may also advantageously enter appropriate information governing trend collection on one or more of the measured parameters, input signals, or the like.

FIG. **2** also shows the power on/off button **226**. Activation of the power on/off button **226** activates and deactivates the monitor **200**. In an embodiment, press-and-hold activation for about two (2) seconds shuts the monitor **200** off. In an additional embodiment, activation of the on/off button **226** advantageously initiates detection of a type of attached sensor. For example, activation of the on/off button **226** may advantageously cause the monitor **200** to read information from a memory on an attached sensor and determine whether sufficient wavelengths exist on the sensor to determine one or more the physiological parameters discussed in the foregoing.

An artisan will recognize from the disclosure herein that the on/off button **226** may advantageously cause an electronic determination of whether to operate in at powers consisted with the U.S. (60 Hz) or another nationality (50 Hz). In an embodiment, such automatic determination and switching is removed from the monitor **200** in order to reduce a likelihood of problematic interfering crosstalk caused by such power switching devices.

Activation of the up/down button **228** may advantageously adjust the volume of the pulse beep tone. Additionally, activation of the up/down button **228** within the menu setup system, causes the selection of values with various menu options.

Moreover, activation of the alarm silence button **230** temporarily silences audio alarms for a predetermined period, such as, for example, about one hundred and twenty (120) seconds. A second activation of the alarm silence button **230** mutes (suspends) the alarm indefinitely, while a third activation returns the monitor **200** to standard alarm monitoring. FIG. **2** also shows the alarm silence button **230** includes an alarm silenced indicator **232**. The alarm silenced indicator **232** may advantageously flash to indicate one or more alarms are temporarily silenced, may illuminate solid to indicate the alarms have been muted, or the like. Moreover, an artisan will recognize from the disclosure herein a wide variety of alarm silencing methodologies.

The monitor **200** also includes a battery level indicator **234** indicating remaining battery life. In the illustrated embodiment, four LED's indicate the status of the battery by incrementally deactivating to indicate proportionally decreasing battery life. In an embodiment, the four LED's may also change color as the battery charge decreases, and the final LED may begin to flash to indicate that the caregiver should replace the batteries.

FIG. **2** also shows the monitor **200** including an audio transducer or speaker **236**. The speaker **236** advantageously

US 8,190,223 B2

13

provides audible indications of alarm conditions, pulse tone and feedback for key-presses, or the like. Moreover, the monitor **200** includes a low signal quality indicator (“SQ” or “SIQTM”) **238**. The signal IQ indicator **238** activates to inform a caregiver that a measured value of the quality of the incoming signal is below predetermined threshold values. For example, in an embodiment, the measured value for signal IQ is at least partially based on an evaluation of the plethysmograph data’s correspondence to predetermined models or characteristics of physiological signals. In an embodiment, the signal IQ indicator **238** output may be associated with the displayed parameter. For example, the output may be associated with one threshold for the display of SpO₂ and another for the display of other parameter data.

The monitor **200** also comprises a perfusion quality index (“PITM”) bar **240** (which quantifies the measure of perfusion of the patient) where in an embodiment a plurality of LED’s activate from a bottom toward a top such that the bar “fills” to a level proportional to the measured value. In one embodiment, the PITM bar **240** shows a static value of perfusion for a given time period, such as, for example, one or more pulses. In another embodiment, or functional setting, the PITM bar **240** may advantageously pulse with a pulse rate, may hold the last reading and optionally fade until the next reading, may indicate historical readings through colors or fades, or the like. Additionally, the PITM bar **240** may advantageously change colors, flash, increasingly flash, or the like to indicate worsening measured values of perfusion.

The PITM bar **240** can be used to simply indicate inappropriate occlusion due, for example, to improper attachment of the sensor **106**. The PITM bar **240** can also be used as a diagnostic tool during low perfusion for the accurate prediction of illness severity, especially in neonates. Moreover, the rate of change in the PITM bar **240** can be indicative of blood loss, sleep arousal, sever hypertension, pain management, the presence or absence of drugs, or the like. According to one embodiment, the PITM bar **240** values may comprise a measurement of the signal strength of the arterial pulse as a percentage of the total signal received. For example, in one preferred embodiment, the alternating portion of at least one intensity signal from the sensor **106** may advantageously be divided by the static portion of the signal. For example, an infrared intensity signal may advantageously be used as it is less subjective to noise.

In an embodiment, a measurement below about 1.25% may indicate medical situations in need of caregiver attention, specifically in monitored neonates. Because of the relevance of about 1.25%, the PITM bar **240** may advantageously include level indicia **242** where the indicia **242** swap sides of the PITM bar **240**, thus highlighting any readings below about that threshold. Moreover, behavior of the PITM bar **240**, as discussed above, may advantageously draw attention to monitored values below such a threshold.

As discussed above, the monitor **200** may include output functionality that outputs, for example, trend perfusion data, such that a caregiver can monitor measured values of perfusion over time. Alternatively or additionally, the monitor **200** may display historical trace data on an appropriate display indicating the measured values of perfusion over time. In an embodiment, the trend data is uploaded to an external computing device through, for example, the multipurpose sensor connector **202** or other input output systems such as USB, serial or parallel ports or the like.

The monitor **200** also includes an alarm indicator **244** capable of providing visual queues of the status of one or more of the measured parameters. For example, the alarm indicator **244** may advantageously be green when all of the

14

measured parameters are within normal conditions, may gradually fade to red, may flash, increasing flash, or the like, as one or more of the measured values approaches or passes predetermined thresholds. In an embodiment, the alarm indicator **244** activates when any parameter falls below an associated threshold, thereby advantageously informing a caregiver that perhaps a nondisplayed parameters is at an alarm condition. In another embodiment, the alarm indicator **244** may indicate the status of the parameter displayed on the multi-mode display **206**. In an embodiment, the speaker **236** may sound in conjunction with and/or in addition to the indicator **244**. Moreover, in an embodiment, an alarming parameter may automatically be displayed, may be emphasized, flashed, colored, combinations of the same or the like to draw a user’s attention to the alarming parameter.

Although the foregoing invention has been described in terms of certain preferred embodiments, other embodiments will be apparent to those of ordinary skill in the art from the disclosure herein.

FIG. 3 illustrates an exemplary display of the patient monitor **200**. As shown in FIG. 3, the display includes the multi-mode display **206**, the pulse rate display **216**, parameter indicators **208**, **210**, the HbCO bar **212** and indicator **204**, the PITM bar **240**, and the alarm indicator **244**. In an embodiment, the multi-mode display **206** and the pulse rate display **216** each comprise a plurality of seven segment displays **302** capable of displaying alpha-numeric information. As disclosed in the foregoing, the exemplary display may advantageously include color-coded parameter displays. Moreover, the exemplary display may include color progressions, flashing, flashing progressions, audible alarms, audible progressions, or the like, indicating worsening measured values of physiological data. In addition, in an embodiment, some or all of the displays may flash at a first rate to indicate attempts to acquire data when actual measured values are unavailable. Moreover, some or all of the display may flash at a second rate to indicate low signal quality where confidence is decreasing that the measured values reflect actual physiological conditions.

FIG. 4 illustrates the display of FIG. 3 showing measured values of SpO₂, BPM, perfusion, and type of sensor, according to an exemplary embodiment of the patient monitor of FIG. 1. As shown in FIG. 4, the multi-mode display **206** is displaying a percentage value of SpO₂, and the pulse rate display **216** is displaying a pulse rate in beats per minute. Accordingly, the parameter indicator **210** is activated to confirm the display of measured values of SpO₂. As disclosed in the foregoing, in an embodiment, the multi-mode display **206** is red, indicating blood oxygen measurements while the pulse rate display **216** is green, indicating normal values of a patient’s pulse.

FIG. 4 also shows the PITM bar **240** almost fully activated, representing good perfusion. In addition, the HbCO indicator **204** is showing communication with a sensor producing insufficient data to determine measured values of additional parameters, such as, HbCO. In an embodiment, such sensors may comprise sensors capable of emitting light at about two (2) different wavelengths, may comprise sensors with insufficient data stored on a memory associated therewith, or the like.

FIG. 5 illustrates the display of FIG. 3 showing measured values of HbCO, perfusion, and type of sensor, according to an exemplary embodiment of the patient monitor of FIG. 1. As shown in FIG. 5, the multi-mode display **206** is displaying a percentage value of HbCO, and the pulse rate display **216** is displaying an appropriate message indicating the HbCO measurement, such as, for example, “CO”. Also, the multi-mode display **206** has shifted the data to the left to quickly and

US 8,190,223 B2

15

efficiently indicate that the displayed parameter is other than SpO₂. Accordingly, the parameter indicator **208** is also activated to confirm the display of measured values of HbCO. As disclosed in the foregoing, in an embodiment, the multi-mode display **206** and pulse rate display message **216** are orange.

FIG. **5** also shows the PTTM bar **240** almost fully activated, representing good perfusion. In addition, the activation of the HbCO indicator **204** represents communication with a sensor capable of producing sufficient data to determine measured values of HbCO. In an embodiment, such sensors may comprise sensors capable of emitting light at about eight (8) or more different wavelengths; however, such sensors may comprise about two (2) or more different wavelengths. Moreover, such sensors may have appropriate data stored on a memory associated therewith, or the like. FIG. **5** also shows the HbCO measurement being about 20% (as illustrated on the HbCO bar **212** and multi-mode display **206**) thereby indicating a potentially dangerous situation that if exacerbated, will become quite problematic. Therefore, the alarm indicator **244** is also activated, and in some embodiments, the speaker **236** as well.

FIG. **6** illustrates the display of FIG. **3** showing measured values of SpO₂, HbCO, BPM, perfusion, and type of sensor, according to an exemplary embodiment of the patient monitor of FIG. **1**. In contrast to FIG. **4**, FIG. **6** shows that the monitor **200** is communicating with a sensor capable of producing sufficient data to determine measured values of HbCO, even though the displayed values are that of SpO₂ and BPM. Thus, FIG. **6** shows the activation of the HbCO indicator **204**, and the continuous monitoring of HbCO by the HbCO bar **212**. FIG. **6** also shows a high value of HbCO, and therefore, the indication of an alarm condition by activation of the alarm indicator **244**. In an embodiment, upon determination of an alarm condition on a nondisplayed parameter, the monitor **200** may advantageously provide an alarm indication through speaker and alarm indicator activation, automatic toggle to the nondisplayed parameter on the multi-mode display **206** for a defined or undefined time, or the like.

FIG. **7** illustrates a top elevation view of an exemplary handheld noninvasive multi-parameter patient monitor **700** capable of displaying at least HbCO and HbMet, such as, for example, the patient monitor of FIG. **1**. Patient monitors exhibiting combinations of many of the features described herein are advantageously commercially available from Masimo under the brand name "Rad 57 cm." As shown in FIG. **7**, the monitor **700** comprises a monitor similar to monitor **200** disclosed with reference to FIG. **2**. Moreover, monitor **700** further includes a multi-mode display **706** capable of displaying, for example, measurements of HbMet and BPM. In an embodiment, the display **706** has insufficient space or display real estate to display the many parameters capable of being measured by the monitor **700**. Thus, the multi-mode display **706** may advantageously cycle through two or more measured parameters. In such embodiments, the monitor **700** may also advantageously include parameter indicators **708**, **710**, providing additional visual queues as to which parameter is currently displayed. In an embodiment, the display **706** may also cycle colors, flash rates, or other audio or visual queues providing readily identifiable information as to which measured parameter is displayed. For example, when the multi-mode display **706** displays measured values of BPM that are normal, the numbers may advantageously appear in green, while normal measured values of HbMet may appear in blue. Moreover, in an embodiment, the display **706** may flash at a predefined rate when searching for saturation and at another predefined rate when a signal quality is below a predetermined threshold.

16

FIG. **7** also illustrates the monitor **700** comprising user input keys **718**, including an HbCO/HbMet button **220**. In an embodiment, activation of the HbCO/HbMet button **720** toggles the measured value displayed in the multi-mode display **706**. For example, activation of the HbCO/HbMet button **720** toggles the multi-mode display **206** from displaying measured values of SpO₂ and BPM, to HbCO and HbMet for about ten (10) seconds. Activation of the mode/enter button **222** or the next button **224** during the ten (10) second period returns the multi-mode display **706** back to SpO₂ and BPM. A skilled artisan will also recognize that activation of the HbCO/HbMet button **720** may advantageously toggle through a plurality of measured values, and that such values may be displayed for short segments and then return to SpO₂ and BPM, may remain displayed until further activation of the button **720**, or the like.

The monitor **700** also comprises a coarser indication of HbMet through an HbMet bar **740**. In an embodiment, a plurality of LED's activate from a bottom toward a top such that the bar "fills" to a level proportional to the measured value, with increments at about 0.5%, about 1%, about 2%, about 3%, about 4%, about 5%, about 7.5%, about 10%, about 15% and greater than about 20%, although an artisan will recognize from the disclosure herein other useful delineations. Additionally, the HbMet bar **740** may advantageously change colors, flash, increasingly flash, or the like to indicate worsening measured values of perfusion.

Although disclosed with reference to the HbMet bar **740**, and artisan will recognize from the disclosure herein other coarse or even gross indications of HbMet, or any measured parameter. For example, a single LED may advantageously show green, yellow, and red, to indicate worsening coarse values of HbMet. Alternatively, a single LED may simply light to indicate an alarm or approaching alarm condition.

FIG. **8** illustrates an exemplary display of the patient monitor **700** of FIG. **7**. As shown in FIG. **8**, the display includes the multi-mode displays **206**, **706**, parameter indicators **208**, **210**, **708**, **710**, the HbCO bar **212** and indicator **204**, the HbMet bar **740**, and the alarm indicator **244**. In an embodiment, the multi-mode display **706** is similar to multi-mode display **206**, comprising a plurality of seven segment displays **302** capable of displaying alpha-numeric information, and capable of altering its display characteristics or aspects in a wide variety of configurations discussed with reference to the display **206**.

FIG. **9** illustrates the display of FIG. **8** showing measured values of SpO₂, BPM, HbCO, HbMet, and type of sensor according to an exemplary embodiment of the patient monitor of FIG. **1**. FIG. **9** also shows the HbMet bar **740** near the bottom and corresponding to about 1%, representing acceptable HbMet, while the HbCO bar **212** hovers at a dangerous near 20%. In addition, the HbCO indicator **204** is showing communication with a sensor producing sufficient data to determine measured values of additional parameters, such as, HbMet, HbCO or the like. In an embodiment, such sensors may comprise sensors capable of emitting light of more than two (2) different wavelengths, preferably more than four (4) different wavelengths, and more preferably eight (8) or more different wavelengths.

FIG. **10** illustrates the display of FIG. **8** showing measured values of HbCO, HbMet, and type of sensor according to an exemplary embodiment of the patient monitor of FIG. **1**. As shown in FIG. **10**, the multi-mode display **706** is displaying a percentage value of HbMet that is shifted using the parameter indicator **708**. The data has been advantageously shifted to the left to quickly and efficiently indicate that the displayed parameter is other than BPM. Accordingly, the parameter indicator **708** is also activated to confirm the display of mea-

US 8,190,223 B2

17

sured values of HbMet. As disclosed in the foregoing, in an embodiment, the multi-mode display **706** is blue.

FIG. **10** also shows the HbMet bar **740** nearly empty, representing acceptable HbMet. In addition, the activation of the HbCO indicator **204** represents communication with a sensor capable of producing sufficient data to determine measured values of HbCO. In an embodiment, such sensors may have appropriate data stored on a memory associated therewith, or the like. FIG. **10** also shows the HbCO measurement being about 20% (as illustrated on the HbCO bar **212** and multi-mode display **206**) thereby indicating a potentially dangerous situation that if exacerbated, will become quite problematic. Therefore, the alarm indicator **244** is also activated, and in some embodiments, the speaker **236** as well.

FIG. **11A** illustrates a perspective view of an exemplary noninvasive multi-parameter patient monitor **1100**, such as, for example, the patient monitor of FIG. **1**. Moreover, FIGS. **11B-11E** illustrate exemplary display screens of the patient monitor of FIG. **11A**. As shown in FIGS. **11A-11B**, an embodiment of the monitor **1100** includes a display **1101** showing a plurality of parameter data. For example, the display may advantageously comprise a CRT or an LCD display including circuitry similar to that available on oximeters commercially available from Masimo Corporation of Irvine, Calif. sold under the name Radical™, and disclosed in the U.S. patents referenced above and incorporated above. However, an artisan will recognize from the disclosure herein many commercially available display components capable of displaying multiple parameter data along with the ability to display graphical data such as plethysmographs, trend traces, and the like.

In an embodiment, the display includes a measured value of SpO₂ **1102**, a measured value of pulse rate **1104** in BPM, a plethysmograph **1106**, a measured value of HbCO **1108**, a measured value of HbMet **1110**, a measured value of a perfusion quality **1112**, a measured value of Hbt **1114**, and a derived value of fractional saturation "SpaO₂" **1116**. In an embodiment, SpaO₂ comprises HbO₂ expressed as a percentage of the four main hemoglobin species, i.e., HbO₂, Hb, HbCO, and HbMet.

In an embodiment, one or more of the foregoing parameter includes trending or prediction indicators **1118** showing the current trend or prediction for that corresponding parameter. In an embodiment, the indicators **1118** may advantageously comprise an up arrow, a down arrow, and a hyphen bar to indicate up trending/prediction, down trending/prediction, or neutral trending/prediction.

FIG. **11C** illustrates an exemplary display screen showing trend graph **1140** including trend line **1142** for HbMet. In an embodiment, the trend line **1142** may be advantageously colored for quick straightforward recognition of the trending parameter, may be associated with any one or more of the foregoing alarm attributes, may include trending lines for other parameters, or the like. The display screen also shows trending directional indicators **1142**, **1144** for many of the displayed physiological parameters. In an embodiment, the directional indicators **1142**, **1144** may advantageously comprises arrows showing the recent trend, predicted trend, user-customizable trend, combinations thereof, or the like for the associated parameters. In an embodiment, the directional indicators **1142**, **1144** comprises an up arrow indicating a rising trend/predicted trend, a middle bar indicating a somewhat stable trend/predicted trend, and a down arrow indicating a lowering trend/predicted trend. An artisan will recognize a wide variety of other directional indicators **1142**, **1144** from the disclosure herein.

18

FIG. **11D** shows an exemplary display screen in vertical format. Such vertical format could be user actuated or based on a gravity switch. FIGS. **11E-11F** illustrate additional displays of various physiological parameters similar to those discussed in the foregoing. As shown in FIG. **11G**, the display includes a measured value of SpO₂ **1162**, a measured value of pulse rate **1164** in BPM, a plethysmograph **1166**, a HbCO bar **1168**, and a HbMet bar **1170**. In an embodiment, the HbCO bar **1168** and HbMet bar **1170** may advantageously behave the same or similarly to the HbCO bar **212** and HbMet bar **712**. Moreover, similar bars may advantageously display any of the physiological parameters discussed herein using display indicia appropriate to that parameter. For example, a SpO₂ or SpaO₂ bar may advantageously range from about 0% to about 100%, and more preferably range from about 50% to about 100%, while a Hbt bar may advantageously range from about 0 to about 30.

Moreover, similar to the disclosure above, the measured value of SpO₂ **1162** may advantageously toggle to measured values of HbCO, HbMet, Hbt, or the like based on, for example, actuation of user input keys, or the like.

In addition to the foregoing, the display may also include graphical data showing one or more color-coded or other identifying indicia for traces of trend data. Moreover, other graphical presentations may advantageously provide readily identifiable indications of monitored parameters or combinations of monitored parameters of the patient. For example, in an embodiment, the display includes a SpaO₂ graph **1172**. The SpaO₂ graph **1172** plots SpO₂ as a function of other blood analytes (1-SpaO₂), where SpaO₂ comprises HbO₂ expressed as a percentage of the four main hemoglobin species, i.e., HbO₂, Hb, HbCO, and HbMet. Thus, as shown in FIG. **11C**, as the slope of the displayed line or arrow increases, the caregiver can readily note that the majority of hemoglobin carriers are being used to carry oxygen, and not, for example, harmful carbon monoxide. On the other hand, as the slope decreases, the caregiver can readily and advantageously note that the number of hemoglobin species available to carry oxygen is decreasing, regardless of the current value of SpO₂. Moreover, the length of the arrow or line also provides an indication of wellness, e.g., the higher the line the more oxygen saturation, the lower the line, the more likely there may be desaturation event, or the like.

Thus, the SpaO₂ graph **1172** provides the caregiver with the ability to recognize that even though the measured value of SpO₂ may be within acceptable ranges, there are potentially an unacceptable number of hemoglobin carriers unavailable for carrying oxygen, and that other potential problems may exist, such as, for example, harmful carbon monoxide levels, or the like. In an embodiment, various alarm conditions may cause the graph **1172** to change color, flash, or any combination of alarm indications discussed in the foregoing. Moreover, FIG. **11** illustrates yet an additional display of the foregoing parameters.

An embodiment may also include the monitor **1000** advantageously defining regions of wellness/severity of the monitored patient. For example, because the graph **1172** comprises two dimensions, the monitor **1000** may advantageously define regions where the patient's measured physiological parameters are considered acceptable, regions where the patient is considered at risk, regions where the patient is critical, and the like. For example, one region of acceptability may include a high SpO₂ and a low 1-SpaO₂, another region of risk may include a high SpO₂ and a high 1-SpaO₂, and another critical region may include a low SpO₂ and a high 1-SpaO₂. Moreover, an artisan will recognize from the dis-

US 8,190,223 B2

19

closure herein that different parameters may also be combined to provide readily identifiable indications of patient wellness.

In addition to or as an alternative to the two dimensional SpO₂ graph **1172**, the monitor **1000** may also include a three dimensional graph, such as, for example, extending the graph **1172** along the variable of time. In this embodiment, the forgoing regions advantageously become three dimensional surfaces of wellness. Moreover, trend data may also be advantageously added to the surface to provide a history of when particular monitored parameters dipped in and out of various surfaces of wellness, risk, criticality, or the like. Such trend data could be color-coded, text identified, or the like. An artisan will also recognize that such surfaces may be dynamic. For example, measurements of HbCO > about 5 may dictate that trend data showing SpO₂ < about 90% should be considered critical; however, measurements of HbCO < about 5 may dictate only SpO₂ < about 85% would be critical. Again, an artisan will recognize from the disclosure herein other parameter combinations to create a wide variety of wellness/critical regions or surfaces that provide readily available visual or audio indications of patient well being, trigger specific alarms, or the like.

Moreover, the monitor **1000** may advantageously employ enlargement or reorganization of parameter data based on, for example, the severity of the measurement. For example, the monitor **1000** may display values for HbCO in a small portion of the screen or in the background, and when HbCO begins to approach abnormal levels, the small portion may advantageously grown as severity increases, even in some embodiments to dominate the display. Such visual alarming can be combined with audio alarms such as announcements, alarms, rising frequencies, or the like, and other visual alarms such as flashing, coloration, or the like to assist a caregiver in noticing the increasing severity of a monitored parameter. In an embodiment, a location of the display of an alarming value is changed to be displayed in a larger display area, such as **1102**, so as to be readily noticeable and its display values readily ascertainable.

Although the foregoing invention has been described in terms of certain preferred embodiments, other embodiments will be apparent to those of ordinary skill in the art from the disclosure herein. For example, the monitor **100** may advantageously be adapted to monitor or be included in a monitor capable of measuring physiological parameters other than those determined through absorption spectroscopy, such as, for example, blood pressure, ECG, EKG, respiratory rates, volumes, inputs for blood pressure sensors, acoustical sensors, and the like. Moreover, the monitor **100** may be adapted for wireless communication to and from the sensor **106**, and/or to and from other monitoring devices, such as, for example, multi-parameter or legacy monitoring devices.

Also, other combinations, omissions, substitutions and modifications will be apparent to the skilled artisan in view of the disclosure herein. Accordingly, the present invention is not intended to be limited by the reaction of the preferred embodiments, but is to be defined by reference to the appended claims.

Additionally, all publications, patents, and patent applications mentioned in this specification are herein incorporated by reference to the same extent as if each individual publication, patent, or patent application was specifically and individually indicated to be incorporated by reference.

What is claimed is:

1. A patient monitor capable of measuring at least two physiological parameters, the patient monitor comprising a display capable of displaying a measured value of a first

20

physiological parameter of body tissue of a monitored patient in a first display area or displaying a measured value of a second physiological parameter of the body tissue in a second display area where the first display area and the second display area comprise at least some common display area capable of displaying information, wherein the common display area changes from displaying one of the measured values of the first or second physiological parameter to displaying the other of the measured values based on an occurrence of an event, the event being the measured value of one of the first or second physiological parameters approaching one or more threshold values indicative of a worsening state of a patient.

2. The patient monitor of claim 1, wherein the first display area and the second display area comprise the common display area.

3. The patient monitor of claim 1, wherein activation of a user input causes the common display area to change from displaying one of the measured value of the first or second physiological parameter to displaying the other of the measured value of the first or second physiological parameter.

4. The patient monitor of claim 1, wherein the common display area is configured to default to displaying one of the measured values of the first or second physiological parameters.

5. The patient monitor of claim 1, wherein the measured value of the first physiological parameter comprises an invasively measured value.

6. The patient monitor of claim 1, wherein the measured value of the first physiological parameter comprises a non-invasively measured value.

7. The patient monitor of claim 1, wherein the measured value of the first physiological parameter comprises glucose.

8. The patient monitor of claim 1, wherein the measured value of the first physiological parameter comprises an indication of oxygen saturation and the measured value of the second physiological parameter comprises an indication of carbon monoxide saturation.

9. The patient monitor of claim 1, wherein the measured value of the first physiological parameter comprises an indication of oxygen saturation and the measured value of the second physiological parameter comprises an indication of methemoglobin saturation.

10. The patient monitor of claim 1, wherein the measured value of the first physiological parameter comprises an indication of carbon monoxide saturation and the measured value of the second physiological parameter comprises an indication of methemoglobin saturation.

11. The patient monitor of claim 1, wherein an aspect of the display changes to illustrate a change in the severity of one of the measured values of the first or second physiological parameters.

12. The patient monitor of claim 11, wherein the aspect that changes comprises a display color.

13. The patient monitor of claim 11, wherein the aspect that changes comprises a display size.

14. The patient monitor of claim 11, wherein the aspect that changes comprises a display intensity.

15. A patient monitor capable of measuring at least two physiological parameters, the patient monitor comprising a display capable of displaying a measured value of a first physiological parameter of body tissue of a monitored patient in a first display area or displaying a measured value of a second physiological parameter of the body tissue in a second display area where the first display area and the second display area comprise at least some common display area capable of displaying information, wherein the common display area changes from displaying one of the measured values

US 8,190,223 B2

21

of the first or second physiological parameters to displaying the other of the measured values of the first or second physiological parameters based on an occurrence of an event, the event being one of the measured values of the first or second physiological parameters alarming.

16. The patient monitor of claim 15, wherein an aspect of an alarm changes when the common display area changes from displaying one of the measured values of the first or second physiological parameters.

17. The patient monitor of claim 16, wherein the aspect that changes comprises a display color.

18. A patient monitor capable of measuring at least two physiological parameters, the patient monitor comprising a display capable of displaying a measured value of a first physiological parameter of body tissue of a monitored patient in a first display area or displaying a measured value of a second physiological parameter of the body tissue in a second display area where the first display area and the second display area comprise at least some common display area capable of displaying information, wherein the common display area changes from displaying one of the measured values of the first or second physiological parameters to displaying the other of the measured values of the first or second physiological parameters automatically based on which is a more critical one of the measured values of the first or second physiological parameters.

19. The patient monitor of claim 18, wherein measured values of the first and second physiological parameters are determined using an output signal of a light sensitive detector capable of detecting light attenuated by the body tissue.

20. The patient monitor of claim 18, wherein at least one of measured physiological parameters is determined noninvasively.

21. A method of displaying two physiological parameter measurements using a display location of a display of a patient monitoring device, the display location being generally capable of displaying a single physiological parameter measurement, the method comprising:

displaying a measured value of a first physiological parameter in a display location of an electronic display; and replacing the display of the measured value of the first physiological parameter with a display of a measured value of a second physiological parameter in the display location when a change in the measurement of the second physiological parameter indicates a worsening state of the patient.

22. The method of claim 21, wherein the indication of the worsening state comprises an alarm condition.

23. The method of claim 21, wherein the measured value of the first physiological parameter comprises an invasively measured value.

24. The method of claim 21, wherein the measured value of the first physiological parameter comprises an indication of oxygen saturation and the measured value of the second physiological parameter comprises an indication of carbon monoxide saturation.

25. The method of claim 21, wherein the measured value of the first physiological parameter comprises an indication of oxygen saturation and the measured value of the second physiological parameter comprises an indication of methemoglobin saturation.

26. The method of claim 21, wherein the measured value of the first physiological parameter comprises an indication of carbon monoxide saturation and the measured value of the second physiological parameter comprises an indication of methemoglobin saturation.

22

27. A patient monitor capable of determining a plurality of physiological parameters from an output signal of a light sensitive detector capable of detecting light attenuated by body tissue, the patient monitor comprising:

a display capable of displaying a measured value of a first blood parameter of body tissue of a monitored patient or displaying a measured value of a second blood parameter of the body tissue; and

a user input button, the activation of which causes the display to change from displaying the measured value of the first blood parameter to displaying the measured value of the second blood parameter, wherein the display also changes from displaying the measured value of the first blood parameter to displaying the measured value of the second blood parameter when the second blood parameter passes an alarm threshold,

wherein the measured values of the first and second blood parameters are determined using an output signal of a noninvasive light sensitive detector capable of detecting light attenuated by the body tissue.

28. The patient monitor of claim 27, wherein the display shifts a positioning of the display of the second blood parameter with respect to a positioning of the display of the first blood parameter.

29. The patient monitor of claim 27, wherein the change is for a predetermined duration and after expiration of the predetermined duration, the display changes back to displaying the measured value of the first blood parameter.

30. The patient monitor of claim 27, wherein the display of the measured value of the first blood parameter comprises a first color under normal conditions and the display of the measured value of the second blood parameter comprises a second color under normal conditions.

31. The patient monitor of claim 27, further comprising a sensor indicator capable of indicating whether an attached sensor can provide sufficient data to determine the measured value of the second blood parameter.

32. The patient monitor of claim 27, wherein the attached sensor can provide data through the output signal and through a memory device.

33. The patient monitor of claim 27, wherein the display displays the first blood parameter when the attached sensor cannot provide the sufficient data.

34. The patient monitor of claim 27, further comprising a memory for storing trend data on one or more of the first and second blood parameters.

35. The patient monitor of claim 27, further comprising an indicator capable of indicating the signal quality of the signals used to determine at least one of the measured values of the first and second blood parameters.

36. The patient monitor of claim 27, further comprising an alarm corresponding to either of the measured values of the first and second blood parameters falling below predetermined associated threshold values.

37. The patient monitor of claim 36, wherein the alarm comprises at least one of an audio or visual alarm.

38. The patient monitor of claim 27, further comprising an additional display indicating perfusion through the body tissue.

39. The patient monitor of claim 27, wherein the first blood parameter comprises a percent oxygen saturation and the second blood parameter comprises a percent carbon monoxide saturation.

40. The patient monitor of claim 39, comprising an additional display capable of indicating the percent carbon monoxide saturation.

US 8,190,223 B2

23

41. The patient monitor of claim 39, comprising an additional display capable of indicating the percent methemoglobin saturation.

42. The patient monitor of claim 27, wherein the display comprises a first display and the patient monitor further comprises a second display capable of displaying a pulse rate. 5

43. The patient monitor of claim 42, wherein the second display is capable of displaying the pulse rate when the first display displays the measured value of the first blood parameter.

44. The patient monitor of claim 42, wherein the second display is capable of displaying indicia identifying the second blood parameter when the first display displays the measured value of the second blood parameter.

24

45. The patient monitor of claim 27, wherein a first activation type of the user input button causes the change to be for a predetermined duration and wherein a second activation type causes the change to be for an undetermined duration.

46. The patient monitor of claim 45, wherein the first activation type comprises a first depression of the user input button and the second activation type comprises an additional depression of the user input button.

10 47. The patient monitor of claim 45, wherein the first activation type comprises a short duration first depression of the user input button and the second activation type comprises a long duration first depression of the user input button.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 8,190,223 B2
APPLICATION NO. : 11/367033
DATED : May 29, 2012
INVENTOR(S) : Ammar Al-Ali et al.

Page 1 of 1


It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On Title Page 2 (Item 56), Column 1, Line 15 (Approx.), Under U.S. Patent Documents,
below "Martin" insert --4,854,328 |08-1989 |Pollack--.

On Title Page 4 (Item 56), Column 1, Line 75, Under U.S. Patent Documents, change "Chin et
al." to --O'Neil et al.--.

In Column 18, Line 54, change "11" to --11H--.

Signed and Sealed this
Thirteenth Day of November, 2012

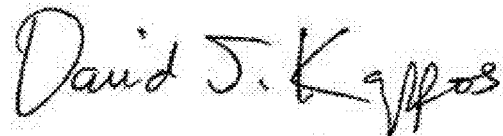A handwritten signature in black ink, reading "David J. Kappos". The signature is written in a cursive, flowing style with a large initial "D".

David J. Kappos
Director of the United States Patent and Trademark Office

US008190223C1

(12) **EX PARTE REEXAMINATION CERTIFICATE** (9610th)
United States Patent
Al-Ali et al.

(10) **Number:** **US 8,190,223 C1**(45) **Certificate Issued:** **Apr. 24, 2013**(54) **NONINVASIVE MULTI-PARAMETER PATIENT MONITOR**

(75) Inventors: **Ammar Al-Ali**, Tustin, CA (US); **Joe Kiani**, Laguna Niguel, CA (US); **Mohamed Diab**, Mission Viejo, CA (US); **Greg Olsen**, Irvine, CA (US); **Roger Wu**, Irvine, CA (US); **Rick Fishel**, Orange, CA (US)

(73) Assignee: **Cercacor Laboratories, Inc.**, Irvine, CA (US)

Reexamination Request:

No. 90/012,559, Sep. 13, 2012

Reexamination Certificate for:

Patent No.: **8,190,223**
 Issued: **May 29, 2012**
 Appl. No.: **11/367,033**
 Filed: **Mar. 1, 2006**

Certificate of Correction issued Nov. 13, 2012

Related U.S. Application Data

(60) Provisional application No. 60/657,596, filed on Mar. 1, 2005, provisional application No. 60/657,281, filed on Mar. 1, 2005, provisional application No. 60/657,268, filed on Mar. 1, 2005, provisional application No. 60/657,759, filed on Mar. 1, 2005.

(51) **Int. Cl.**
A61B 5/00 (2006.01)

(52) **U.S. Cl.**

USPC 600/300; 600/323; 600/324


(58) **Field of Classification Search** None
 See application file for complete search history.

(56) **References Cited**

To view the complete listing of prior art documents cited during the proceeding for Reexamination Control Number 90/012,559, please refer to the USPTO's public Patent Application Information Retrieval (PAIR) system under the Display References tab.

Primary Examiner — Robert Nasser(57) **ABSTRACT**

Embodiments of the present disclosure include a handheld multi-parameter patient monitor capable of determining multiple physiological parameters from the output of a light sensitive detector capable of detecting light attenuated by body tissue. For example, in an embodiment, the monitor is capable of advantageously and accurately displaying one or more of pulse rate, plethysmograph data, perfusion quality, signal confidence, and values of blood constituents in body tissue, including for example, arterial carbon monoxide saturation ("HbCO"), methemoglobin saturation ("HbMet"), total hemoglobin ("Hbt"), arterial oxygen saturation ("SpO₂"), fractional arterial oxygen saturation ("SpaO₂"), or the like. In an embodiment, the monitor advantageously includes a plurality of display modes enabling more parameter data to be displayed than the available physical display real estate.

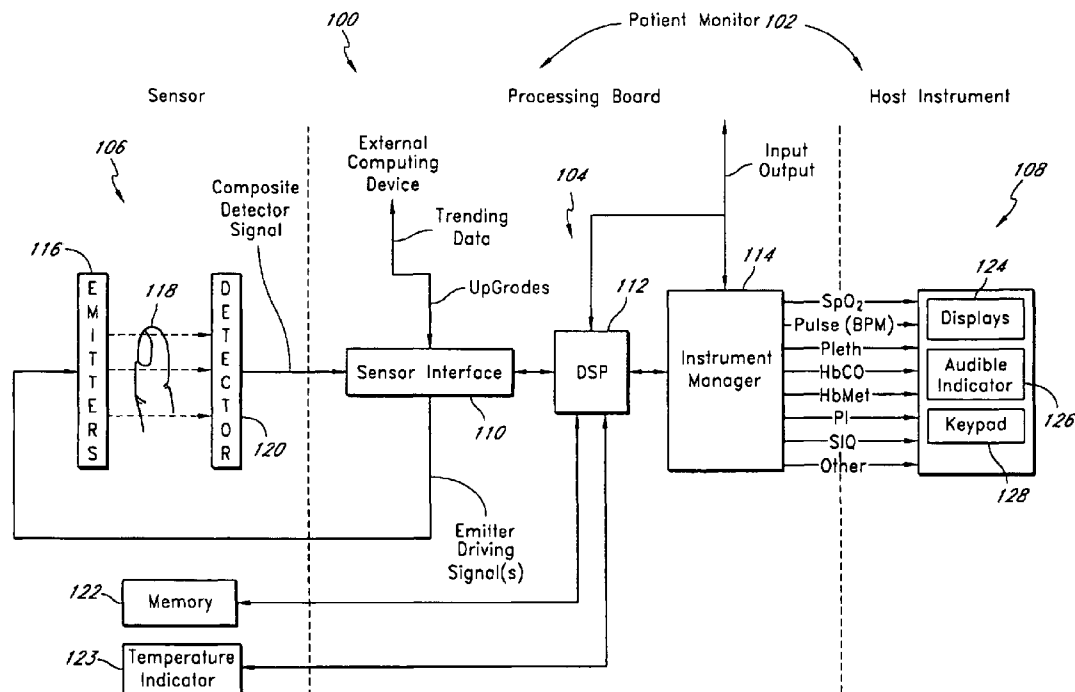

US 8,190,223 C1

1
EX PARTE
REEXAMINATION CERTIFICATE
ISSUED UNDER 35 U.S.C. 307

THE PATENT IS HEREBY AMENDED AS
INDICATED BELOW.

Matter enclosed in heavy brackets [] appeared in the patent, but has been deleted and is no longer a part of the patent; matter printed in italics indicates additions made to the patent.

AS A RESULT OF REEXAMINATION, IT HAS BEEN DETERMINED THAT:

The patentability of claims 21-26 is confirmed.

Claims 1, 3, 7, 13, 15, 18, 27-28 and 45 are determined to be patentable as amended.

Claims 2, 4-6, 8-12, 14, 16-17, 19-20, 29-44 and 46-47, dependent on an amended claim, are determined to be patentable.

1. A patient monitor capable of measuring at least two physiological parameters, the patient monitor comprising a display capable of displaying a measured value of a first physiological parameter of body tissue of a monitored patient in a first display area or displaying a measured value of a second physiological parameter of the body tissue in a second display area where the first display area and the second display area comprise at least some common display area capable of displaying information, wherein *in* the common display area [changes from displaying], *the display of* one of the measured values of the first or second physiological parameter [to displaying] *is replaced with* the other of the measured values based on an occurrence of an event, the event being the measured value of one of the first or second physiological parameters approaching one or more threshold values indicative of a worsening state of a patient.

3. The patient monitor of claim 1, wherein activation of a user input causes the common display area to [change from displaying] *replace* one of the measured value of the first or second physiological parameter [to displaying] *with* the other of the measured value of the first or second physiological parameter.

7. [The patient monitor of claim 1] *A patient monitor capable of measuring at least two physiological parameters, the patient monitor comprising a display capable of displaying a measured value of a first physiological parameter of body tissue of a monitored patient in a first display area or displaying a measured value of a second physiological parameter of the body tissue in a second display area where the first display area and the second display area comprise at least some common display area capable of displaying information, wherein the common display area changes from displaying one of the measured values of the first or second physiological parameter to displaying the other of the measured values based on an occurrence of an event, the event being the measured value of one of the first or second physiological parameters approaching one or more threshold values indicative of a worsening state of a patient, wherein the measured value of the first physiological parameter comprises glucose.*

13. [The patient monitor of claim 11] *A patient monitor capable of measuring at least two physiological parameters, the patient monitor comprising a display capable of displaying a measured value of a first physiological parameter of*

2

body tissue of a monitored patient in a first display area or displaying a measured value of a second physiological parameter of the body tissue in a second display area where the first display area and the second display area comprise at least some common display area capable of displaying information, wherein the common display area changes from displaying one of the measured values of the first or second physiological parameter to displaying the other of the measured values based on an occurrence of an event, the event being the measured value of one of the first or second physiological parameters approaching one or more threshold values indicative of a worsening state of a patient, wherein an aspect of the display changes to illustrate a change in the severity of one of the measured values of the first or second physiological parameters, wherein the aspect that changes comprises a display size.

15. A patient monitor capable of measuring at least two physiological parameters, the patient monitor comprising a display capable of displaying a measured value of a first physiological parameter of body tissue of a monitored patient in a first display area or displaying a measured value of a second physiological parameter of the body tissue in a second display area where the first display area and the second display area comprise at least some common display area capable of displaying information, wherein *in* the common display area [changes from displaying], *the display of* one of the measured values of the first or second physiological parameters [to displaying] *is replaced with* the other of the measured values of the first or second physiological parameters based on an occurrence of an event, the event being one of the measured values of the first or second physiological parameters alarming.

18. A patient monitor capable of measuring at least two physiological parameters, the patient monitor comprising a display capable of displaying a measured value of a first physiological parameter of body tissue of a monitored patient in a first display area or displaying a measured value of a second physiological parameter of the body tissue in a second display area where the first display area and the second display area comprise at least some common display area capable of displaying information, wherein *in* the common display area [changes from displaying], *the display of* one of the measured values of the first or second physiological parameters [to displaying] *is replaced with* the other of the measured values of the first or second physiological parameters automatically based on which is a more critical one of the measured values of the first or second physiological parameters.

27. A patient monitor capable of determining a plurality of physiological parameters from an output signal of a light sensitive detector capable of detecting light attenuated by body tissue, the patient monitor comprising:

- a display capable of displaying a measured value of a first blood parameter of body tissue of a monitored patient or displaying a measured value of a second blood parameter of the body tissue; and
- a user input button, the activation of which [causes] *replaces* the display [to change from displaying] *of* the measured value of the first blood parameter [to displaying] *with* the measured value of the second blood parameter, wherein the display [also changes from displaying] *of* the measured value of the first blood parameter [to displaying] *is replaced by* the measured value of the second blood parameter when the second blood parameter passes an alarm threshold, wherein the measured values of the first and second blood parameters are determined using an output signal of a

US 8,190,223 C1

3

noninvasive light sensitive detector capable of detecting light attenuated by the body tissue.

28. [The patient monitor of claim 27] *A patient monitor capable of determining a plurality of physiological parameters from an output signal of a light sensitive detector capable of detecting light attenuated by body tissue, the patient monitor comprising:*

a display capable of displaying a measured value of a first blood parameter of body tissue of a monitored patient or displaying a measured value of a second blood parameter of the body tissue; and

a user input button, the activation of which causes the display to change from displaying the measured value of the first blood parameter to displaying the measured value of the second blood parameter, wherein the display also changes from displaying the measured value of the first blood parameter to displaying the measured value of the second blood parameter when the second blood parameter passes an alarm threshold,

wherein the measured values of the first and second blood parameters are determined using an output signal of a noninvasive light sensitive detector capable of detecting light attenuated by the body tissue,

wherein the display shifts a positioning of the display of the second blood parameter with respect to a positioning of the display of the first blood parameter.

4

45. [The patient monitor of claim 27] *A patient monitor capable of determining a plurality of physiological parameters from an output signal of a light sensitive detector capable of detecting light attenuated by body tissue, the patient monitor comprising:*

a display capable of displaying a measured value of a first blood parameter of body tissue of a monitored patient or displaying a measured value of a second blood parameter of the body tissue; and

a user input button, the activation of which causes the display to change from displaying the measured value of the first blood parameter to displaying the measured value of the second blood parameter, wherein the display also changes from displaying the measured value of the first blood parameter to displaying the measured value of the second blood parameter when the second blood parameter passes an alarm threshold,

wherein the measured values of the first and second blood parameters are determined using an output signal of a noninvasive light sensitive detector capable of detecting light attenuated by the body tissue,

wherein a first activation type of the user input button causes the change to be for a predetermined duration and wherein a second activation type causes the change to be for an undetermined duration.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 8,190,223 B2
APPLICATION NO. : 11/367033
DATED : May 29, 2012
INVENTOR(S) : Ammar Al-Ali et al.

Page 1 of 1


It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On Title Page 2 (Item 56), Column 1, Line 15 (Approx.), Under U.S. Patent Documents,
below "Martin" insert --4,854,328 |08-1989 |Pollack--.

On Title Page 4 (Item 56), Column 1, Line 75, Under U.S. Patent Documents, change "Chin et
al." to --O'Neil et al.--.

In Column 18, Line 54, change "11" to --11H--.

Signed and Sealed this
Thirteenth Day of November, 2012

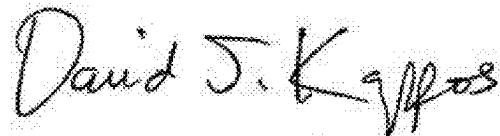A handwritten signature in dark ink, reading "David J. Kappos". The signature is written in a cursive, flowing style with a large initial "D".

David J. Kappos
Director of the United States Patent and Trademark Office